

Ø248

Ø240

RAM[®] 400 Series

Hydraulic Control Valves

R 2.00

R 2

6.3

6.3


R 3

G

50

SEE "SEAT DI

AT DETAIL NO. 2"

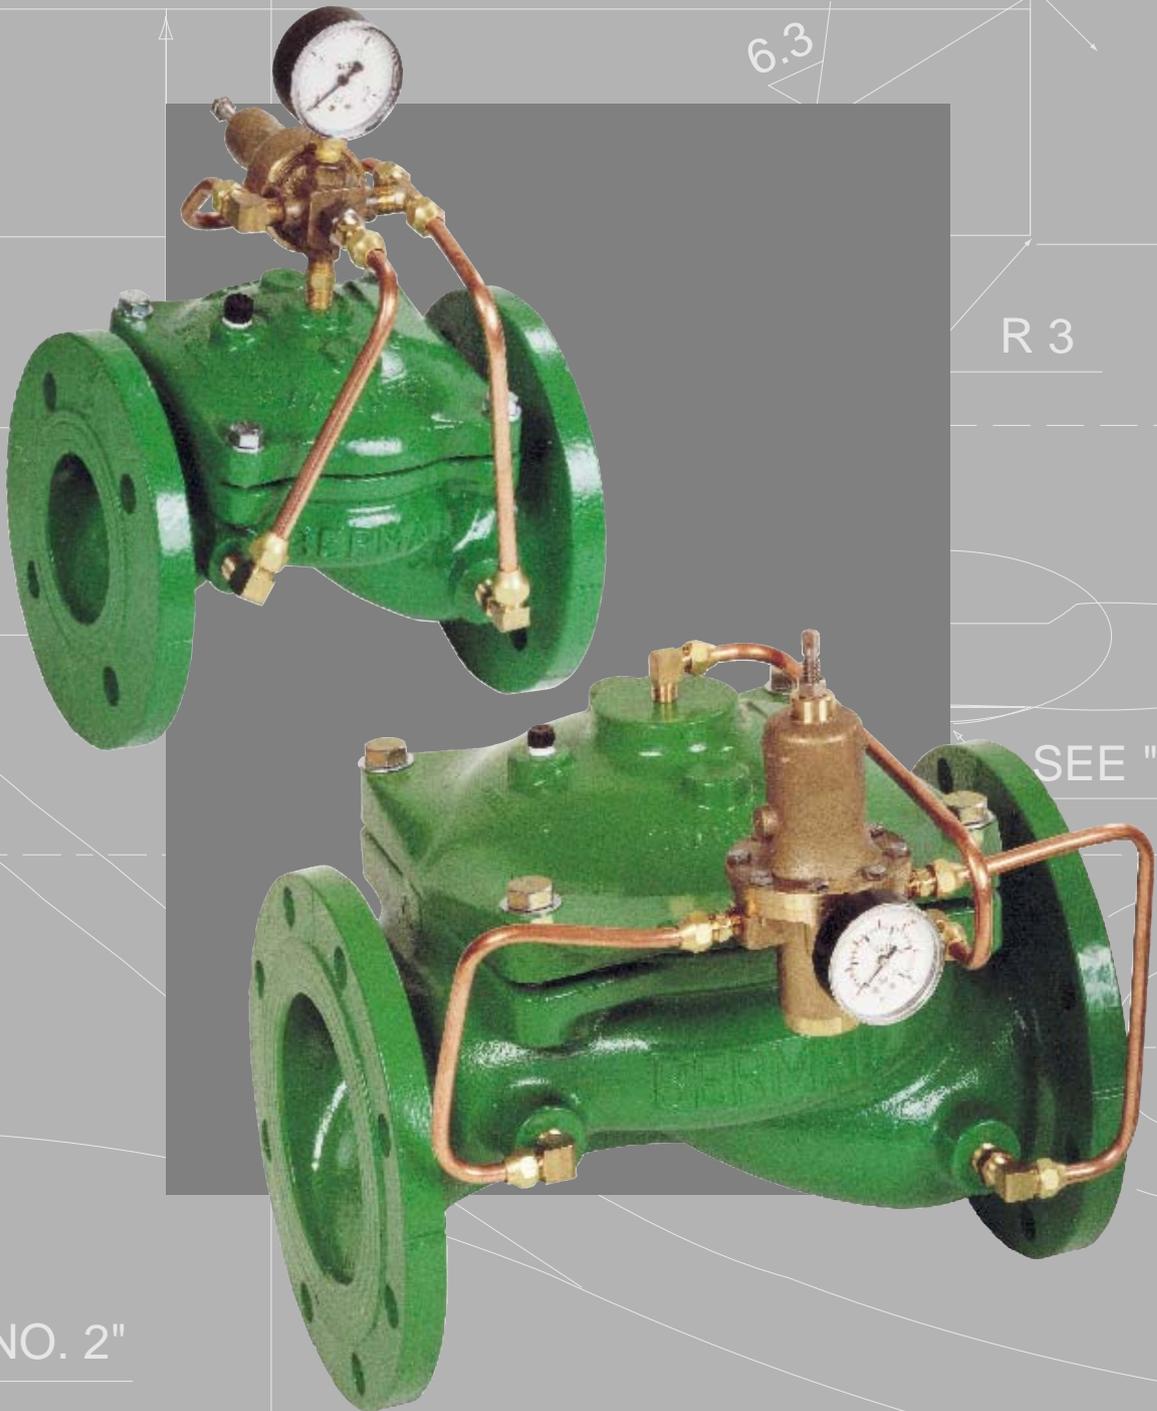



technical specifications

Globe pattern

RAM 400 Series

Technical data

Valve Pattern: Globe

Sizes: 3/4", 1", 1 1/2", 2", 2 1/2", 3", 4", 6", 8", 10", 12" & 16"R

End Connections:

- Female threaded NPT/BSP
3/4", 1", 1 1/2", 2", 2 1/2", 3"R & 3"
- Grooved (Victaulic):
2", 3", 4" & 6"
- Flanged: ISO PN16, ANSI 125, BST-D
2", 2 1/2", 3"R, 3", 4", 6", 8", 10", 12" & 16"R

Operating Pressure Range:

0.5-16 bar (7-230 psi)

Temperature Range:

Water up to 80°C (175°F)


Materials:

- Body and Cover:
3/4", 1", 1 1/2" Brass only
2"-16"R Cast Iron, Polyester coated
- Diaphragm: Nylon-fabric Reinforced Natural Rubber; Options: NBR, EPDM
- Spring: Stainless steel


(Other materials and coatings available on request).



Flow Chart

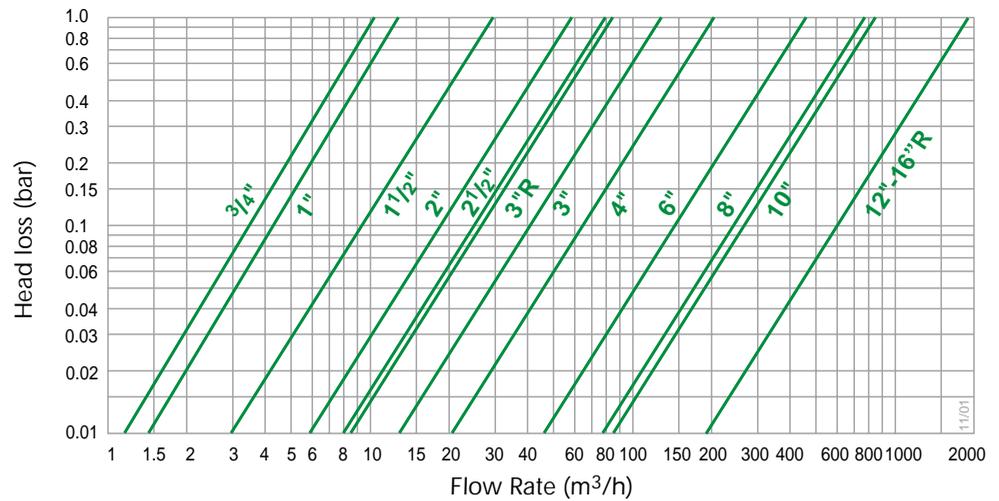

Dimensions and Weights



	Threaded						Grooved (Victaulic)				Flanged										
Size	3/4"	1"	1 1/2"	2"	2 1/2"	3"	2"	3"	4"	6"	2"	2 1/2"	3"R	3"	4"	6"	8"	10"	12"	16"R	
L (mm)	112	112	150	180	210	210	205	250	320	415	205	205	210	250	320	415	500	605	724	742	
H (mm)	67.5	67.5	83	111	133	140	106	156	190	404	155	178	187	210	242	345	430	460	635	695	
Hf* (mm)	-	-	-	205	226	228	260	200	255	300	609	245	260	270	310	328	550	660	690	930	971
W (mm)	72	72	90	120	129	129	175	120	175	200	306	155	178	200	200	223	306	365	405	580	600
R (mm)	20	20	27.5	38	46	55	55	32	46	60	85	78	89	100	100	112	140	170	202	240	300
Weight (kg)	0.95	0.95	1.5	4.0	5.7	5.8	13.0	5.0	10.6	16.2	49.0	9.0	10.5	12.1	19.0	28.0	68.0	125.0	140.0	290.0	377.0

*H_f = Height with optional flow stem (at open position)

technical specifications

Angle pattern



RAM 400 Series

Technical data

Valve Pattern: Angle

Sizes: 2", 2 1/2", 3" & 4"

End Connections:

- Female threaded NPT/BSP
2", 2 1/2" & 3"
- Grooved (Victaulic):
3" & 4"
- Flanged: ISO PN 16, ANSI 125, BST-D
2", 3" & 4"

Operating Pressure Range:

0.5-16 bar (7-230 psi)

Temperature Range:


Water up to 80°C (175°F)

Materials:


- Body and cover: Cast Iron, Polyester-coated
 - Diaphragm: Nylon-fabric Reinforced Natural Rubber; Options: NBR, EPDM
 - Spring: Stainless steel
- (Other materials and coatings available on request).



Flow Chart

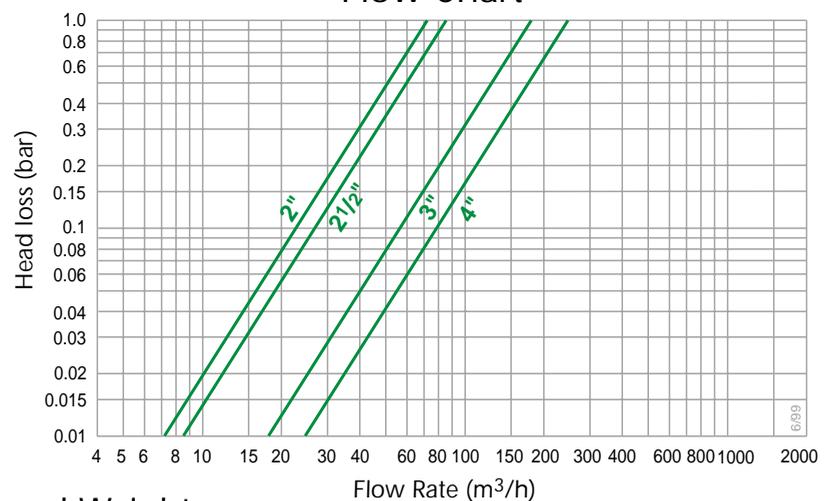

Dimensions and Weights



Size	Threaded			Grooved (Victaulic)		Flanged		
	2"	2 1/2"	3"	3"	4"	2"	3"	4"
L (mm)	70	110	110	120	160	121	153	160
H (mm)	119	182	184	194	223	157	200	223
Hf* (mm)	211	275	336	346	309	249	278	309
W (mm)	118	131	170	170	204	155	200	223
h (mm)	61	93	80	90	112	83	101	112
R (mm)	38	65	55	45	58	78	100	112
Weight (kg)	4.4	5.8	11.0	10.0	16.0	9.0	17.0	26.0


*Hf = Height with optional flow stem (at open position)



typical applications

General view

RAM 400 Series

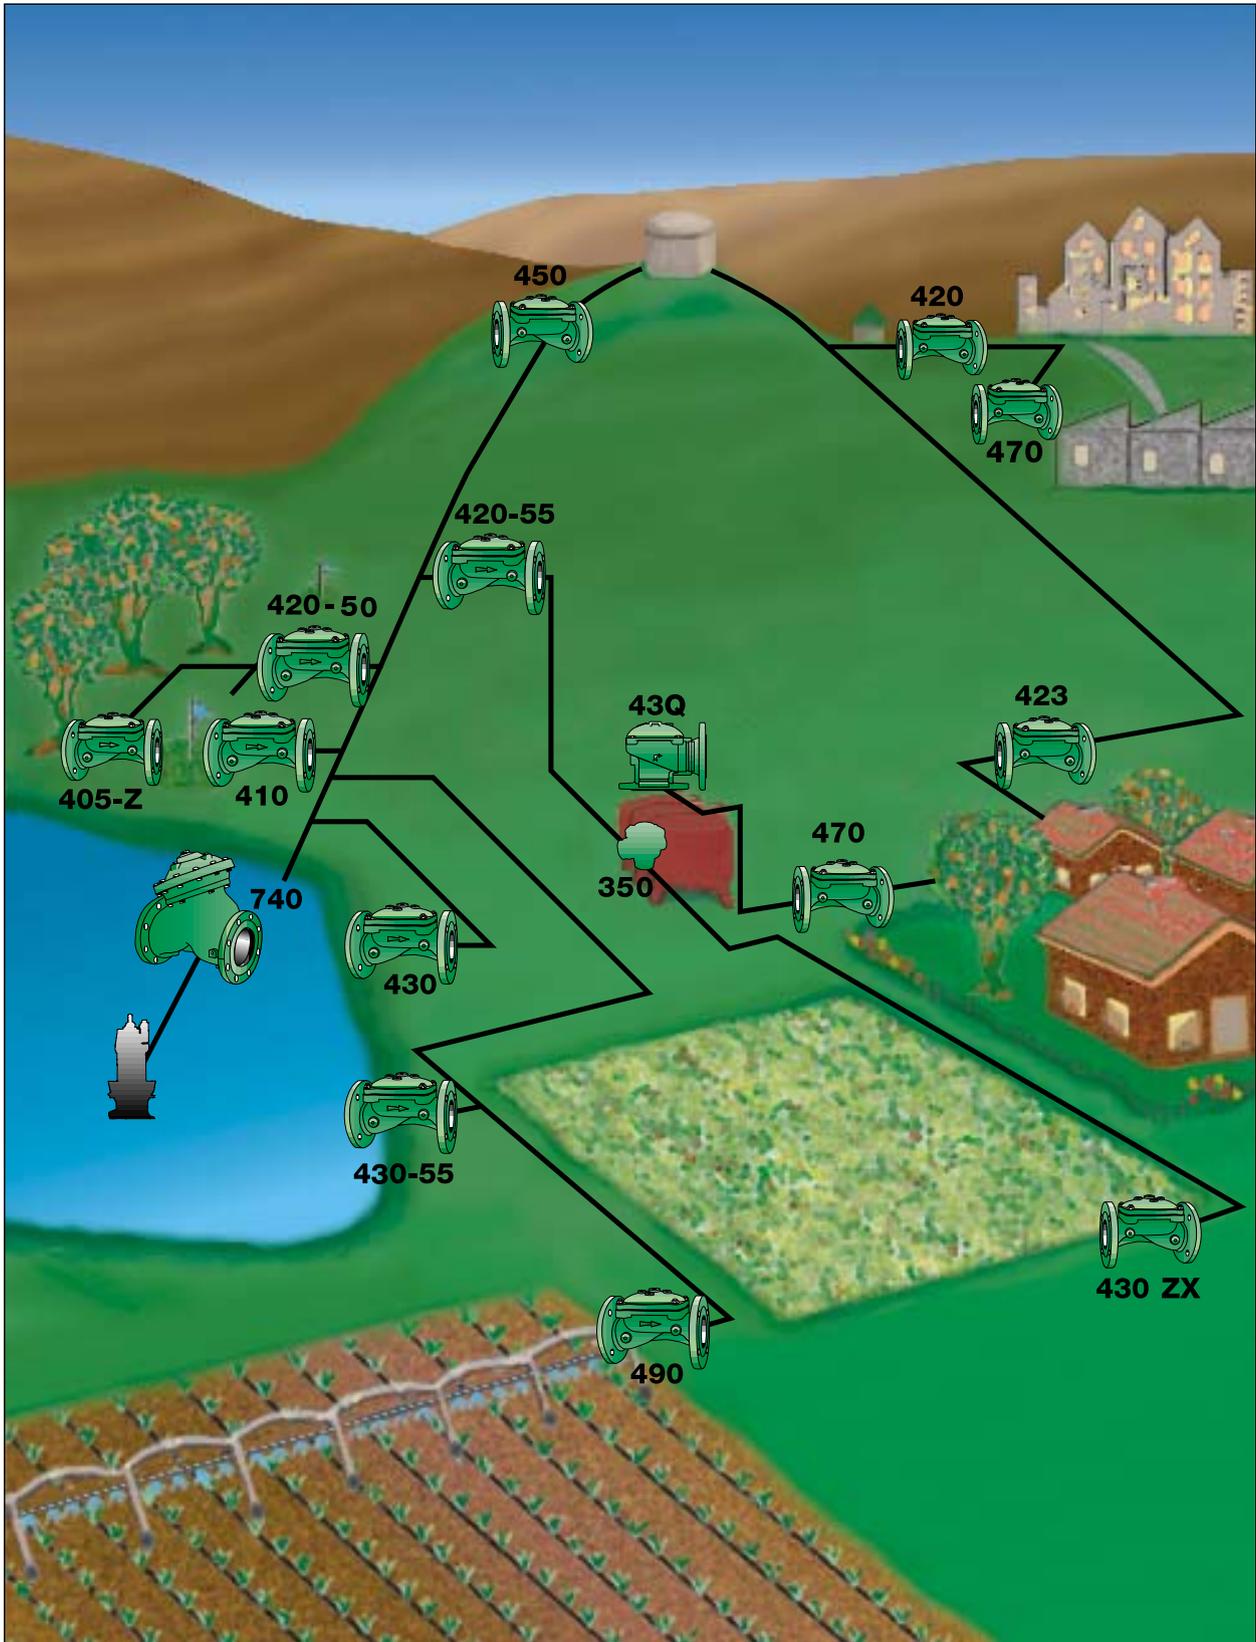




RAM 400 Series


Description

Model 405-Z Hydraulic Control Valve is designed to open and close drip-tight in response to an hydraulic remote command/or local command. Standard valve is supplied with a 4-way ball valve that selects positions between open, close, or auto.

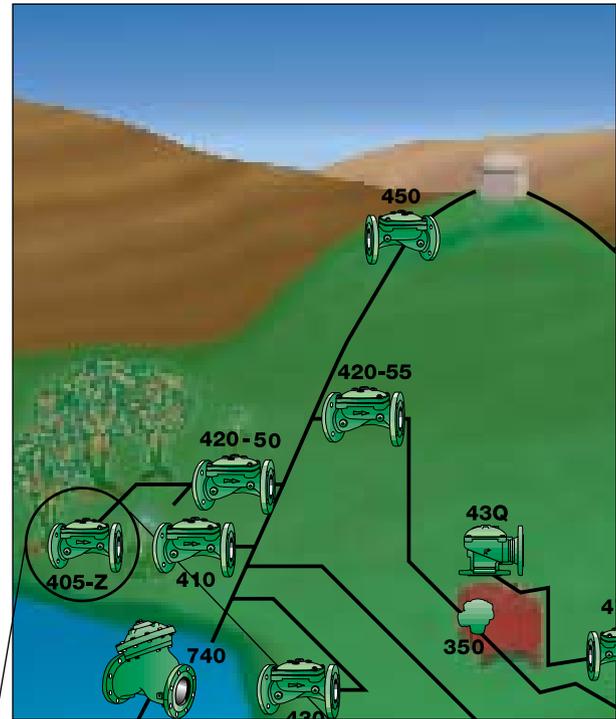

Control list

- | | |
|-------|------------------|
| 400-G | RAM 400-Globe |
| 26 | 4-way Cock Valve |

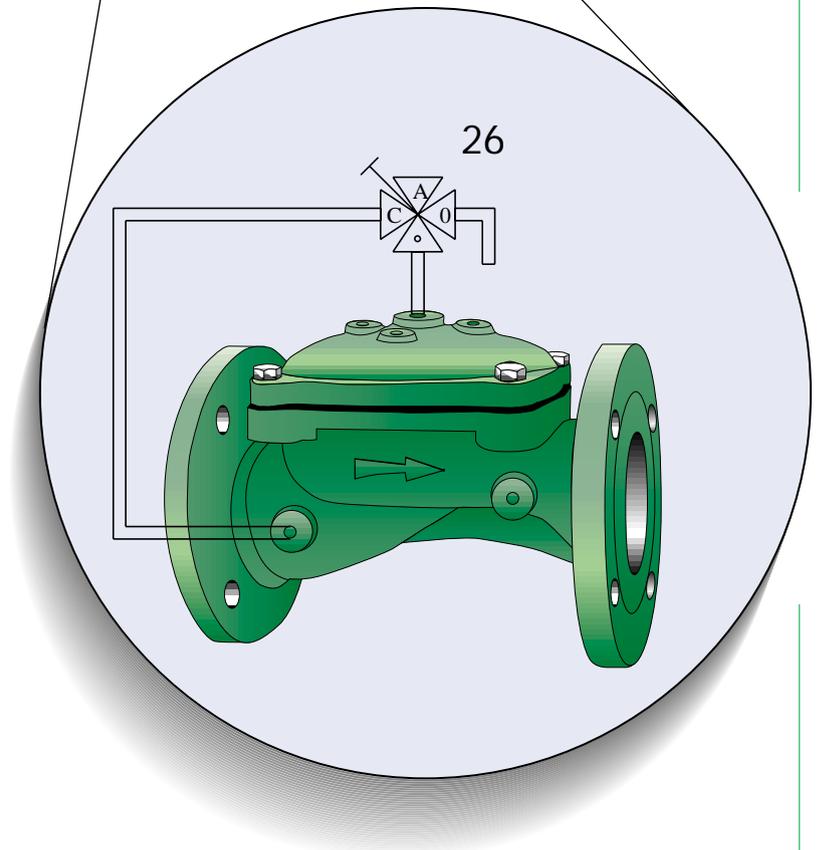



Model 410

Electric Remote Diaphragm Control Valve

RAM 400 Series

Description

Model 410 Electrical Remote Control Valve is designed to open and close drip-tight in response to an electrical signal.



- The valve opens and closes in response to an electrical signal. Used in automatic industrial and irrigation systems.

Note: The standard model is normally closed (N.C.) [energized to open]. The normally open (N.O.) model is also available on request.

OPTIONAL


Electric Remote Control Valve

- * (with BERMAD Solenoid to suite valve sizes 2" up to 4").
- * Sizes 6" to 10" is supplied with ASCO solenoid.

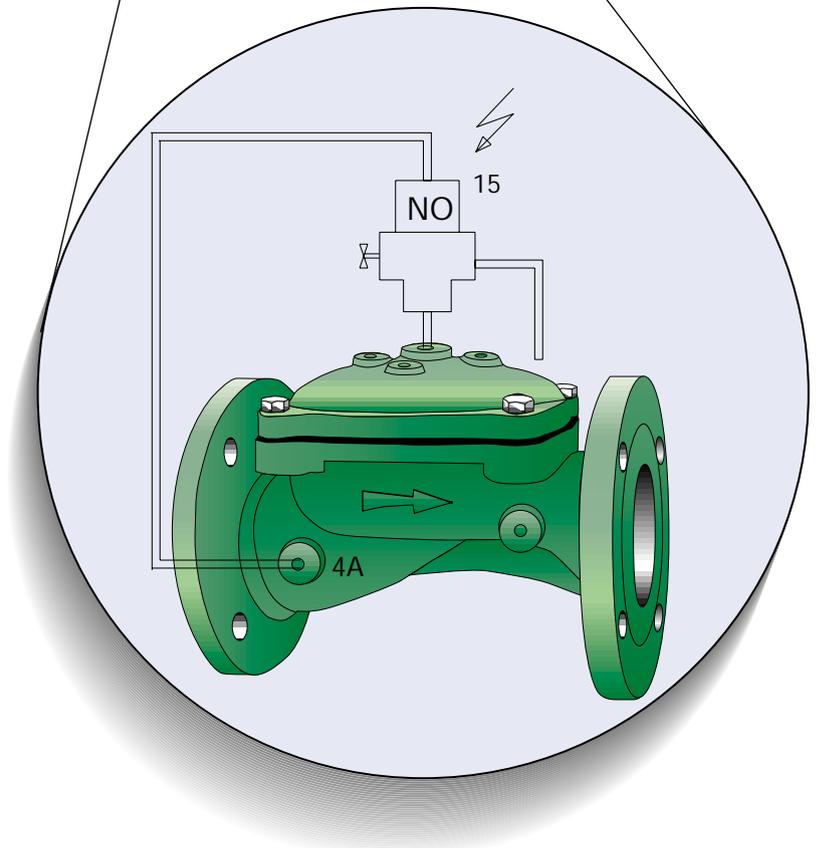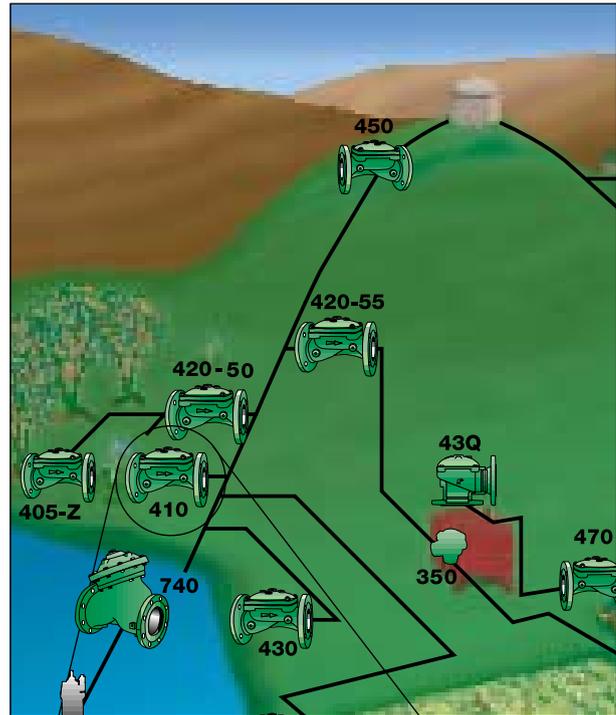

Control list

400-G	RAM 400-Globe
4A	In line, Self Flushing Filter
15	3-way, N.O.Sol.Pilot valve



RAM 400 Series



Pressure-Reducing Valve (with 2W PC-20-A pilot)

Description

Model 420 Pressure Reducing Valve is an automatic control valve designed to reduce a higher inlet pressure to a lower constant outlet pressure, regardless of fluctuating flow rates and/or varying inlet pressure. It is a pilot-controlled, hydraulically operated diaphragm-type globe or angle 405 valve.

The pressure-regulating pilot senses down-stream pressure and modulates open or close, causing the main valve to throttle, thus maintaining constant delivery pressure. The pressure-regulating pilot has an adjusting screw to preset the desired pressure,

When down-stream pressure falls below the pilot setting, the pilot and main valve modulate open to increase pressure and maintain pilot setting. When down-stream pressure rises above the pilot setting, the pilot and main valve throttle close to decrease pressure and maintain pilot setting.

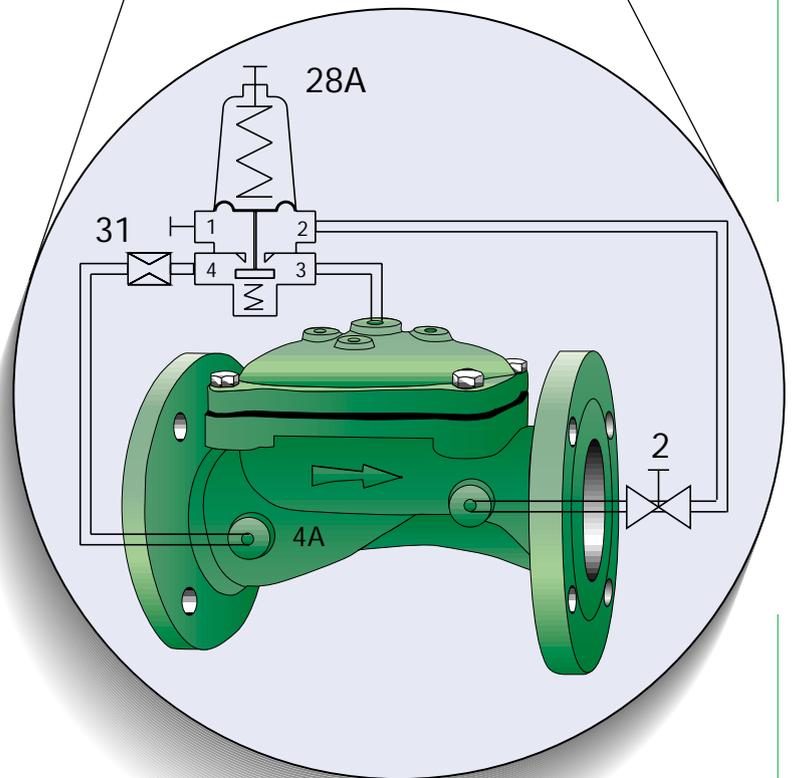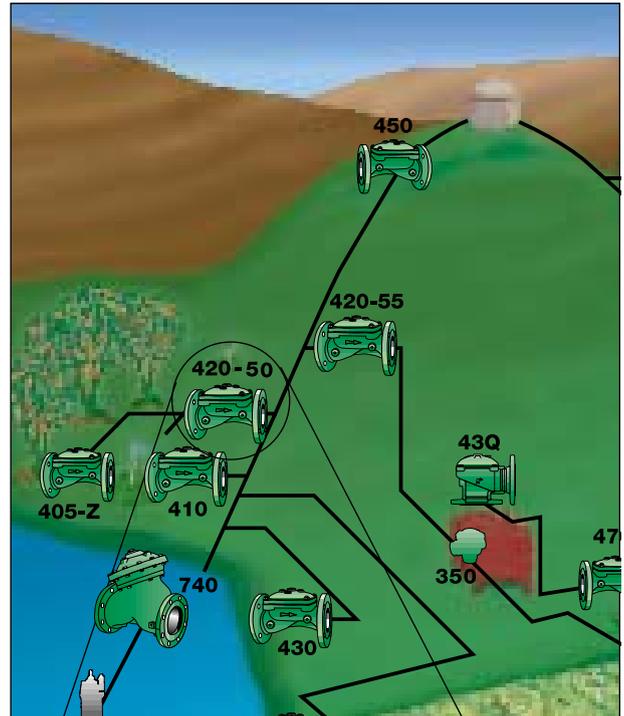

Control list

400-G	RAM 400-Globe
28A	2-way Pressure-Reducing, Pilot Valve,
4A	In line, Self Flushing Filter
31	Control Orifice
2	Cock Valve



M o d e l 4 2 0

Pressure-Reducing Valve (with #2 2W pilot valve)



RAM 400 Series

Description

Model 420 Pressure-Reducing Valve is an automatic control valve designed to reduce a higher inlet pressure to a lower constant outlet pressure, regardless of fluctuating flow rates and/or varying inlet pressure. It is a pilot controlled, hydraulically operated diaphragm-type globe or angle 405 valve.

The pressure-regulating pilot senses down-stream pressure and modulates open or closed, causing the main valve to throttle, thus maintaining constant delivery pressure. The pressure-regulating pilot has an adjusting screw to preset the desired pressure,

When down-stream pressure falls below the pilot setting, the pilot and main valve modulate open to increase pressure and maintain pilot setting. When down-stream pressure rises above the pilot setting, the pilot and main valve throttle closed to decrease pressure and maintain pilot setting.

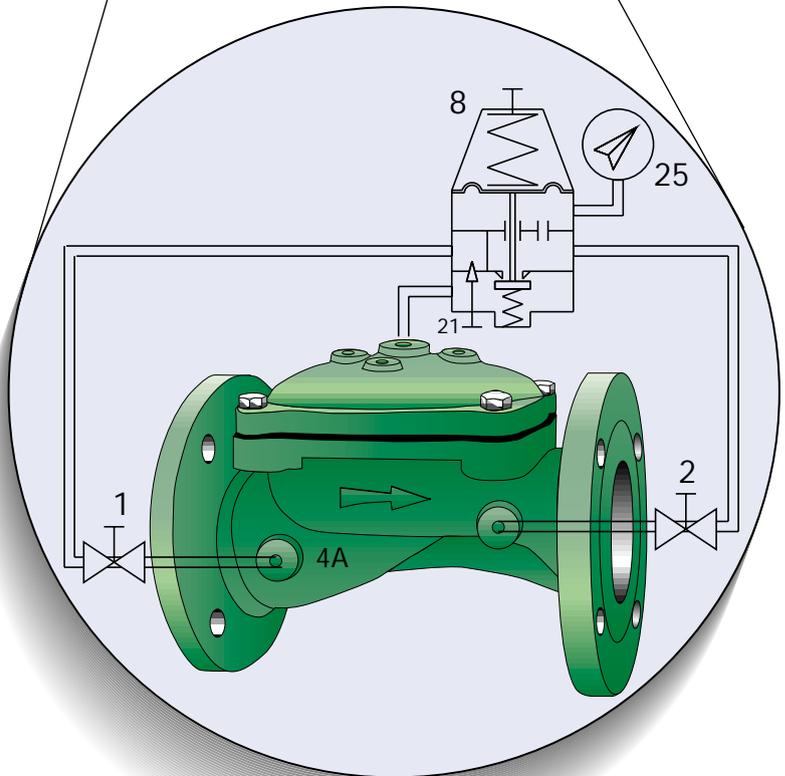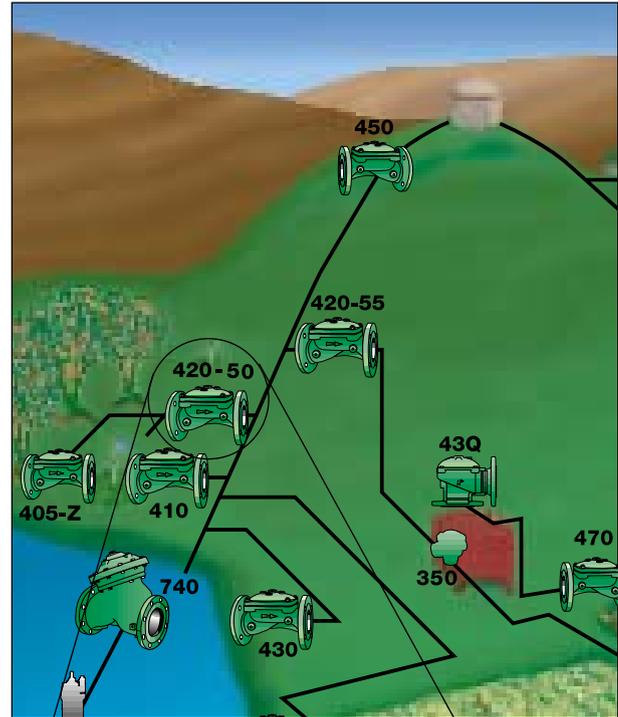

Control list

- | | |
|-------|--|
| 400-G | RAM 400-Globe |
| 8 | 2/way Pressure-Reducing, Pilot Valve 2-way |
| 4A | Self Flushing Filter |
| 1 | Cock Valve |
| 2 | Cock Valve |
| 25 | Pressure Gauge |
| 21 | Needle valve |



RAM 400 Series

Pressure-Reducing w. Hydraulic Remote Control



Description

Model 420-50 Pressure-Reducing Valve is an automatic control valve designed to reduce a higher inlet pressure to a lower constant outlet pressure regardless of fluctuating flow rates and/or varying inlet pressure. It is a pilot-controlled, hydraulically operated-rated diaphragm-type globe or angle 405 valve.

The pressure-regulating pilot senses down-stream pressure and modulates open or close, causing the main valve to throttle, thus maintaining constant delivery pressure. The pressure-regulating pilot has an adjusting screw to preset the desired pressure. When down-stream pressure falls below the pilot setting, the pilot and main valve modulate open to increase pressure and maintain pilot setting.

When down-stream pressure rises above the pilot setting, the pilot and main valve throttle close to decrease pressure and maintain pilot setting.

A mini hydraulic valve is installed at the control loop to enable remote shut-off by an irrigation controller.

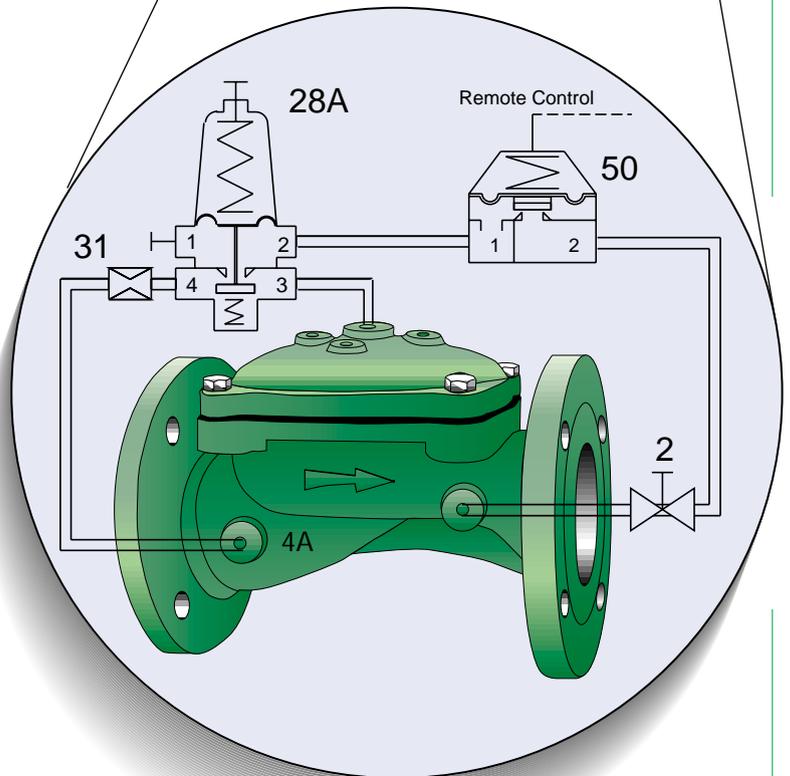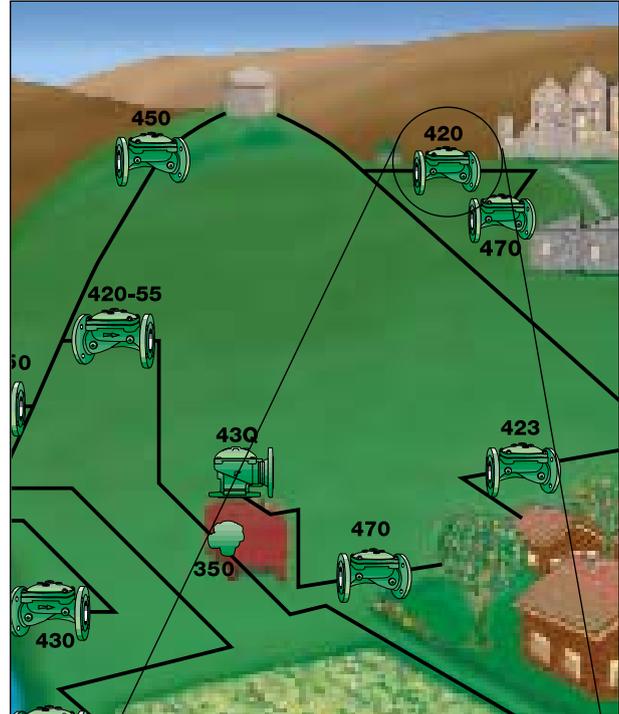

Control list

- | | |
|-------|-------------------------------------|
| 400-G | RAM 400-Globe |
| 4A | In line, Self Flushing Filter |
| 2 | Cock Valve |
| 28A | 2-way Pressure Reducing Pilot Valve |
| 50 | Hyd. Remote Control Valve |
| 20 | 2-way Hyd. Pilot Valve |
| 31 | Control Orifice |



RAM 400 Series

Model 420-55-ZX

Pressure-Reducing w. Electric Shut-off Control & Manual Control Selector (with 3W pilot valve PC-X-A)

Description

Model 420-55 Pressure-Reducing Valve is an automatic control valve designed to reduce a higher inlet pressure to a lower constant outlet pressure regardless of fluctuating flow rates and/or varying inlet pressure. It is a pilot-controlled, operated diaphragm-type globe or angle 405 valve.

The pressure-regulating pilot senses down-stream pressure and modulates open or closed, causing the main valve to throttle, thus maintaining constant delivery pressure. The pressure-regulating pilot has an adjusting screw to preset the desired pressure,

When down-stream pressure falls below the pilot setting, the pilot and main valve modulate open to increase pressure and maintain pilot setting.



When down-stream pressure rises above the pilot setting, the pilot and main valve throttle closed to decrease pressure and maintain pilot setting.

Electrical remote control via a solenoid valve intercepts normal pressure regulation for on/off control. The 3W pilot regulation enables the valve to open fully when pressure in the main system falls below set point. Available in two types:

- Standard: N.C. (normally closed) energized to open
- Optional: N.O. (normally open) energized to close.

Control list

- 400-G RAM 400-Globe
- 4A In line, Self Flushing Filter
- 26 4-way Cock Valve
- 15M 3-way N.O. Sol. w. Manual Override
- 32A 3-way Positioning Pilot Valve

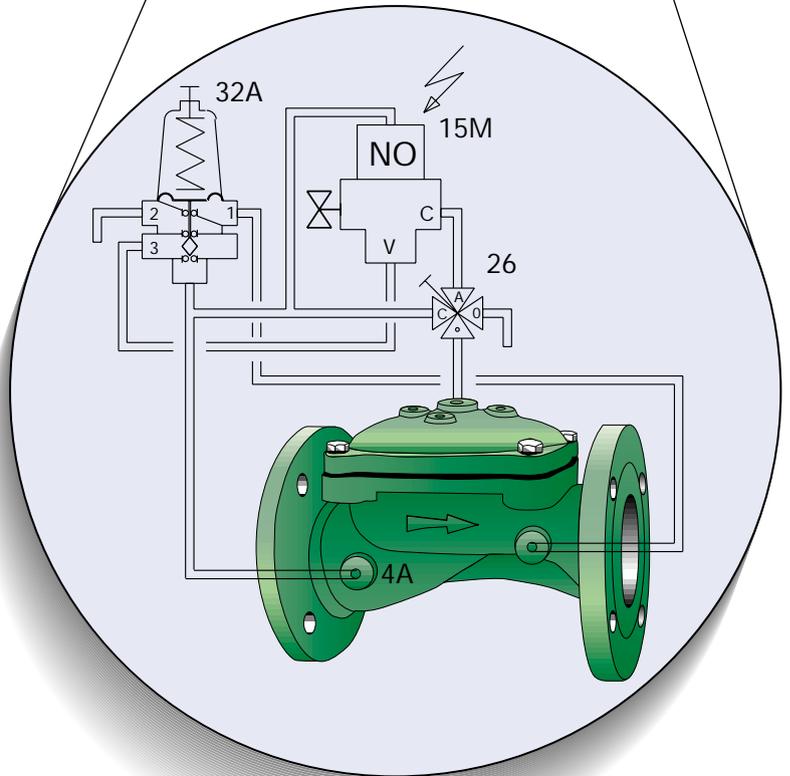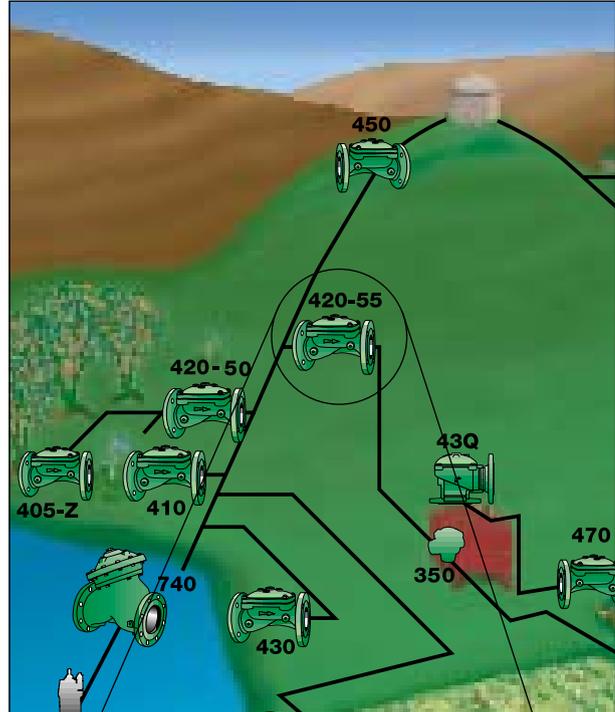



RAM 400 Series



Pressure-Reducing & Pressure-Sustaining Control Valve

Description

Model 423 Pressure-Reducing & Pressure-Sustaining Valve is an automatic control valve designed to maintain constant preset minimum up-stream pressure, and to maintain a constant reduced system pressure regardless of changing system demand.

It is a pilot-controlled, hydraulically operated diaphragm type globe or angle 405 valve. The pressure-regulating pilot senses up-stream pressure and modulates open or closed, causing the main valve to throttle.

The pressure-regulating pilot has an adjusting screw to preset the desired pressure. When up-stream pressure rises above the sustaining pilot setting, the pilot and the main valve modulate to open to relieve main line pressure and maintain pilot setting pressure. When up-stream pressure falls below the pilot setting, pilot and main valve throttle closed to maintain the preset pilot setting pressure. When down-stream pressure rises above the reducing pilot setting, the pilot and main valve throttle closed to decrease pressure and maintain pilot setting.

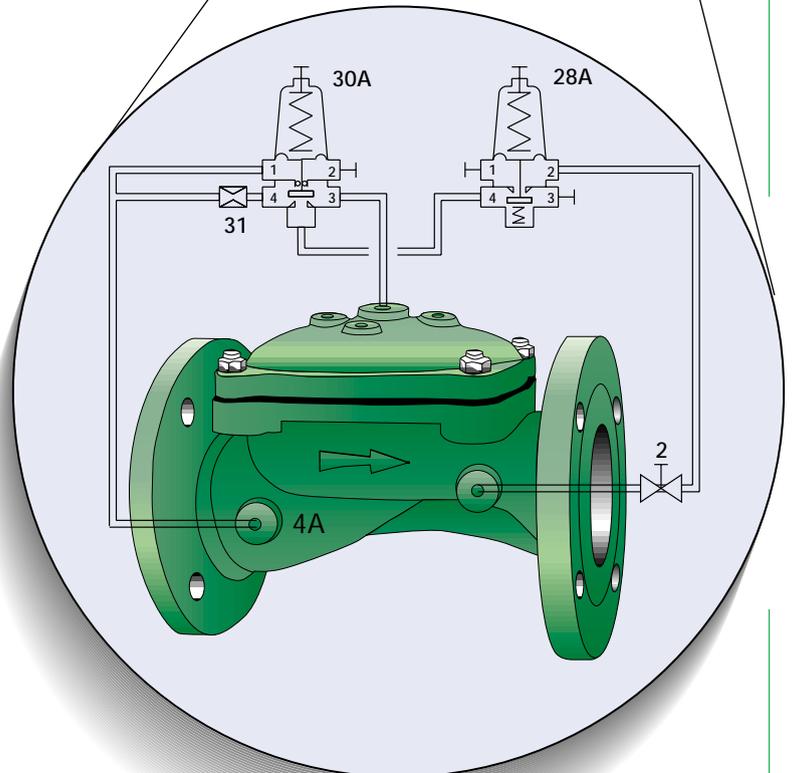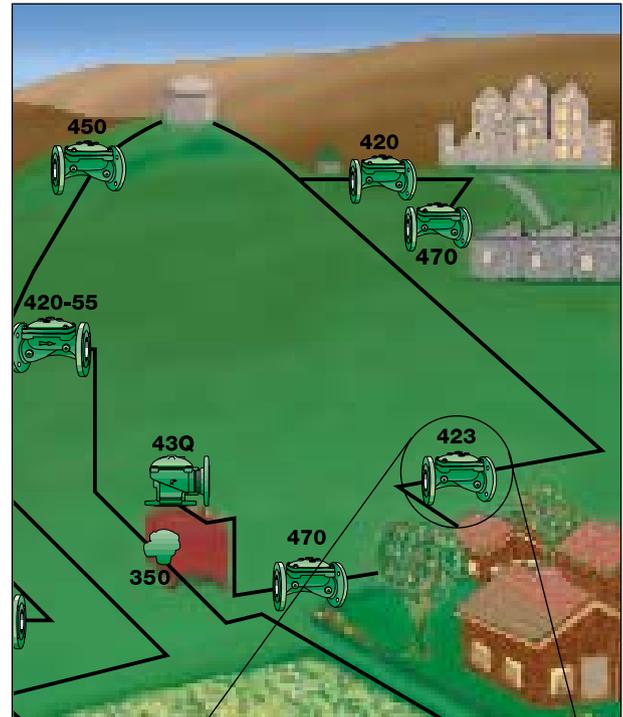

Control list

400-G	RAM 400-Globe
4A	In line, Self Flushing Filter
2	Cock Valve
30A	2-way Pressure-Sustaining Pilot
28A	2-way Pressure-Reducing Pilot Valve
31	Control Orifice



Model 430

Pressure-Sustaining Valve (with 2W PC-30-A Pilot Valve)

RAM 400 Series



Description

Model 430 Pressure-Sustaining valve is an automatic control valve designed to relieve excess pressure or sustain a minimum up-stream back-pressure. It is a pilot-controlled, hydraulically operated diaphragm-type globe or angle 405 valve.

The pressure-regulating pilot senses up-stream pressure and modulates open or close, causing the main valve to throttle. The pressure-regulating pilot has an adjusting screw to preset the desired pressure. When up-stream pressure rises above the pilot setting, the pilot and the main valve modulate to open to relieve main line pressure and maintain pilot setting pressure.

When up-stream pressure falls below the pilot setting, pilot and main valve throttle closed to maintain the preset pilot setting pressure.

- Sizes 2"-4".
- Pressure setting range: 0.5 to 12 bar.

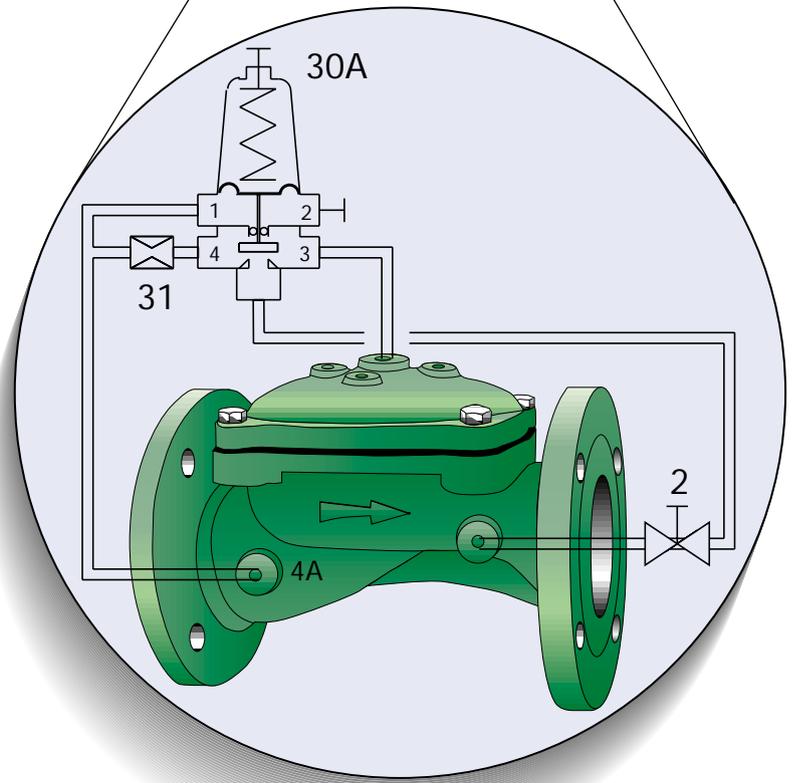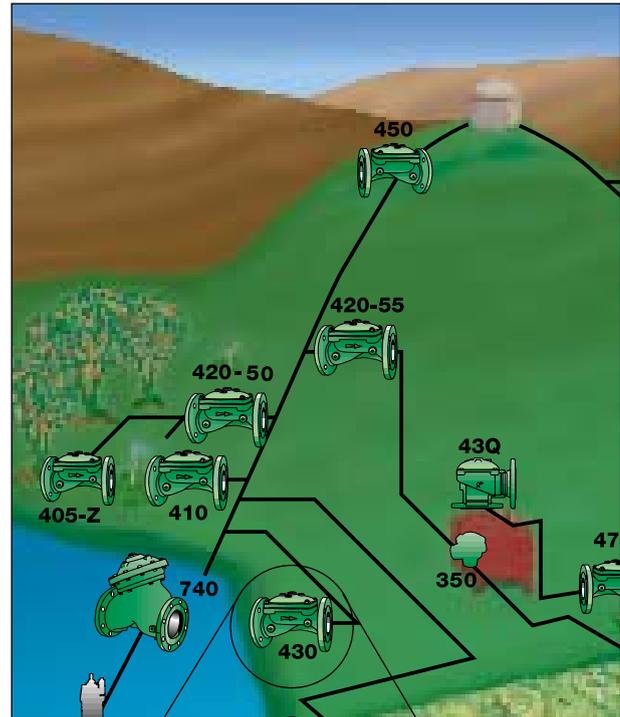

Control list

400-G	RAM 400-Globe
4A	In line, Self Flushing Filter
30A	2-way Pressure-Sustaining Relief Pilot Valve
31	Control Orifice
2	Cock Valve



RAM 400 Series

Pressure-Sustaining Control Valve (with 2W #3 Pilot Valve)



Description

Model 430 Pressure-Sustaining valve is an automatic control valve designed to relieve excess pressure or sustain a minimum up-stream back-pressure. It is a pilot-controlled, hydraulically operated diaphragm-type globe or angle 405 valve.

The pressure-regulating pilot senses up-stream pressure and modulates open or closed, causing the main valve to throttle. The pressure-regulating pilot has an adjusting screw to preset the desired pressure. When up-stream pressure rises above the pilot setting, the pilot and the main valve modulate to open to relieve main line pressure and maintain pilot setting pressure.

When up-stream pressure falls below the pilot setting, pilot and main valve throttle closed to maintain the preset pilot setting pressure.

- Sizes 6"-10".
- Pressure setting range: 0.5 to 16 bar.

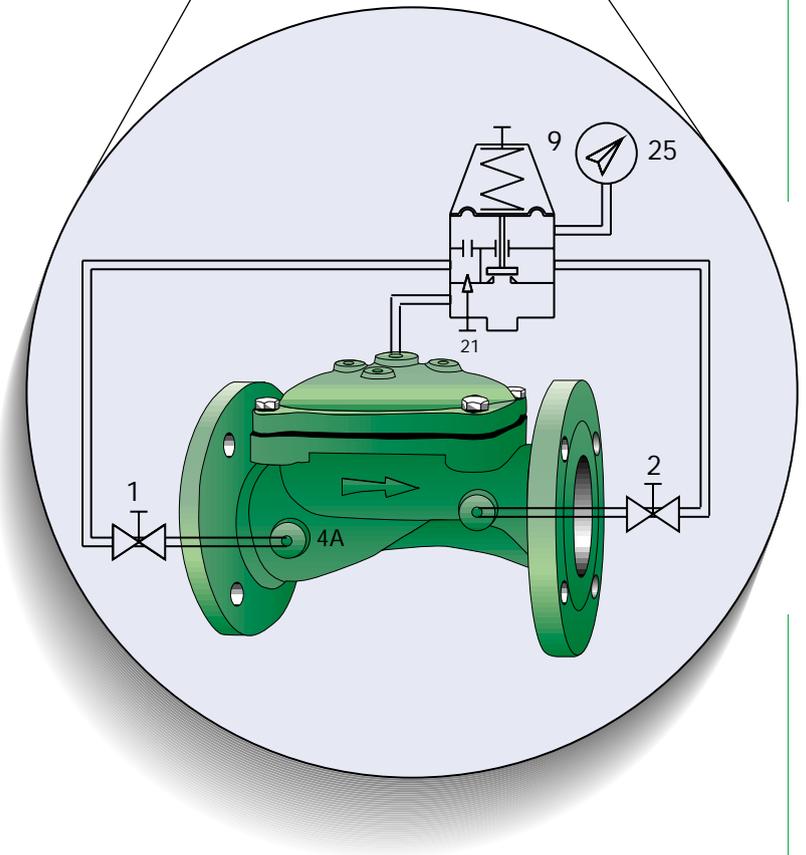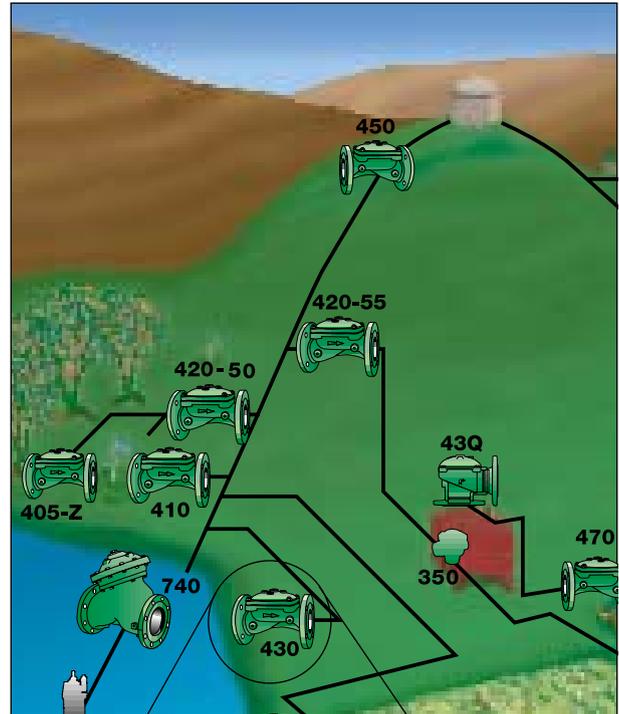

Control list

400-G	RAM 400-Globe
9	2-way Pressure-Sustaining/ Relief Pilot Valve #3
21	Needle Valve
4A	In-Line Self Flushing Filter
1	Cock Valve
2	Cock Valve
25	Pressure Gauge



RAM 400 Series

M o d e l 4 3 0 - Z X

Pressure-Sustaining Control Valve

(with 3W PC-X-A Pilot)



Description

Model 430-zx Pressure-Sustaining valve is an automatic control valve designed to relieve excess pressure or sustain a minimum up-stream back-pressure. It is a pilot-controlled, hydraulically operated diaphragm-type globe or angle 405 valve.

The pressure-regulating pilot senses up-stream pressure and modulates open or close, causing the main valve to throttle. The pressure-regulating pilot has an adjusting screw to preset the desired pressure. When up-stream pressure rises above the pilot setting, the pilot and the main valve modulate to open to relieve main line pressure and maintain pilot setting pressure.

When up-stream pressure falls below the pilot setting, pilot and main valve throttle close to maintain the preset pilot setting pressure.

Model 430-zx is specifically designed for sustaining pressure in low pressure zones. The 3w pilot can be fully open most of the time without causing any extra head loss to the system. The valve is activated only when pressure falls below the set point.

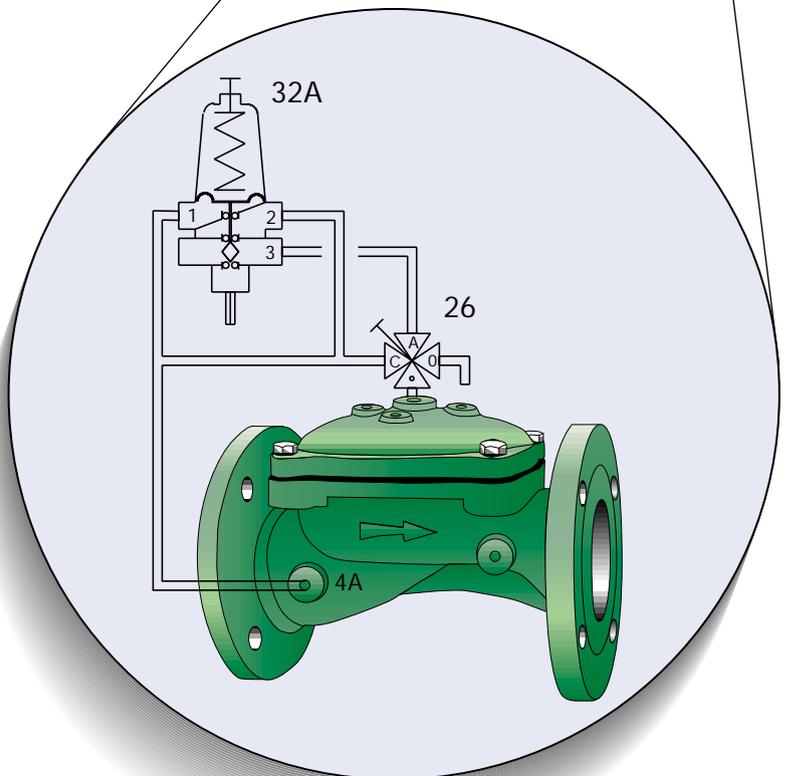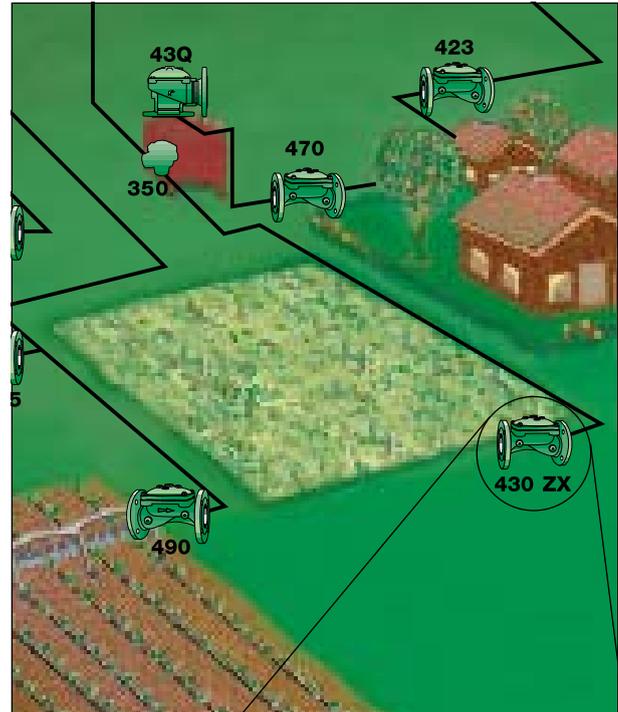

Control list

- 400-G RAM 400-Globe
- 4A In line, Self Flushing Filter
- 32A 3-way Positioning Pilot Valve
- 26 4-way Cock Valve



RAM 400 Series

Pressure-Sustaining Valve w. Electric Control

Description

Model 430-55 Pressure-Sustaining Valve is an automatic control valve designed to relieve excess pressure or sustain a minimum up-stream back-pressure. It is a pilot-controlled, hydraulically operated diaphragm-type globe or angle 405 valve. The pressure-regulating pilot senses up-stream pressure and modulates open or close, causing the main valve to throttle.



The pressure-regulating pilot has an adjusting screw to preset the desired pressure. When up-stream pressure rises above the pilot setting, the pilot and the main valve modulate to open to relieve main line pressure and maintain pilot setting pressure. When up-stream pressure falls below the pilot setting, pilot and main valve throttle closed to maintain the preset pilot setting pressure.

Electrical remote control via a solenoid valve intercepts normal pressure regulation for on/off control. Available in two types:

- Standard: N.C. (normally closed) energized to open
- Optional: N.O. (normally open) energized to close.

Control list

- 400-G RAM 400-Globe
- 4A In line, Self Flushing Filter
- 26 4-way Cock Valve
- 32A 3-way Positioning Pilot Valve
- 15B 3-Way N.O.BERMAD Sol. Pilot Valve

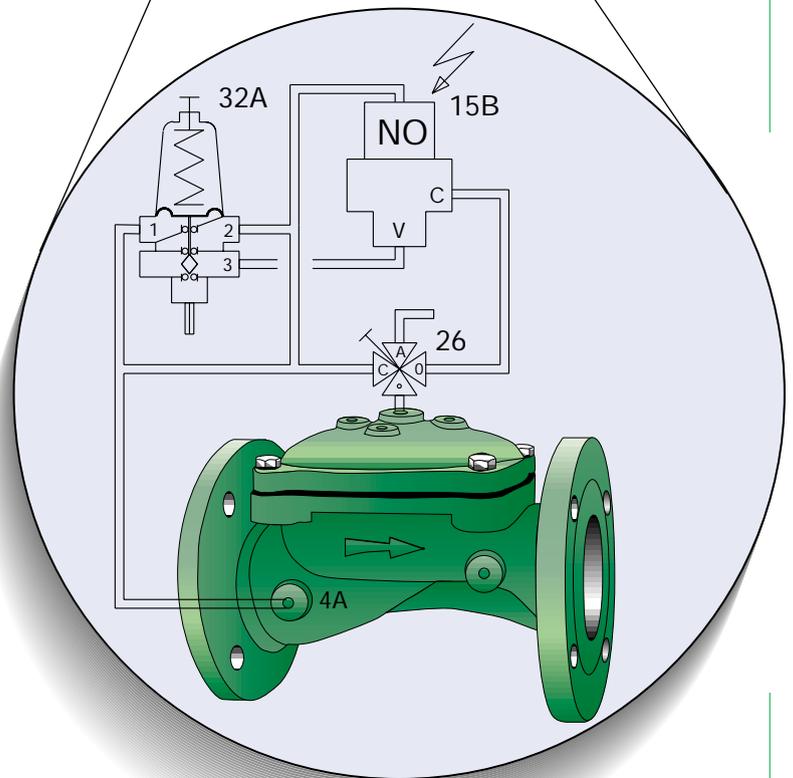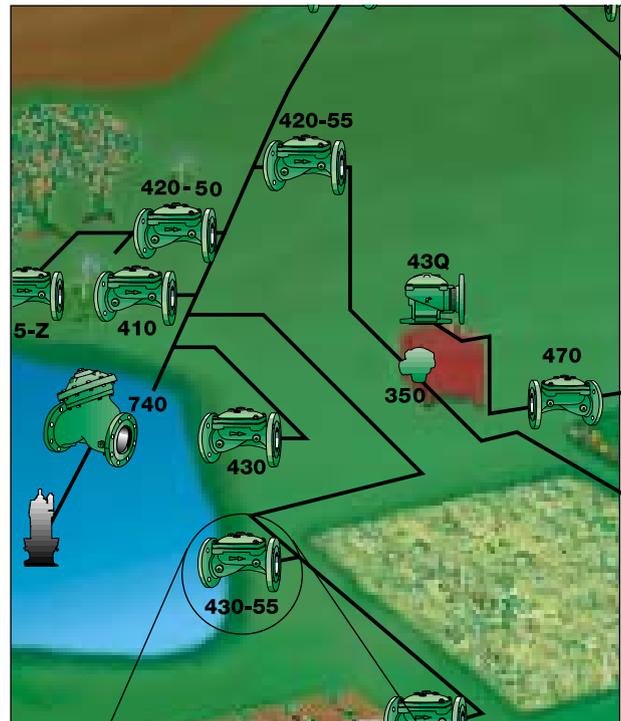



M o d e l 4 3 Q

Pressure Relief Valve (Quick Action Type)



RAM 400 Series

Description

Model 43Q Quick Pressure Relief Valve is an automatic control valve specially designed to provide a solution to the typical problems associated with springload relief valves when constant drifting of relief adjustment occurs.

The valve comprises: accurate relief pressure setting that remains constant, opening to full capacity on minimum pressure rise in the pipe line; regulated rate of closure providing smooth closure without causing pressure surges.

- Used in sizes 2"-4".
- Pressure setting up to 12 bars.

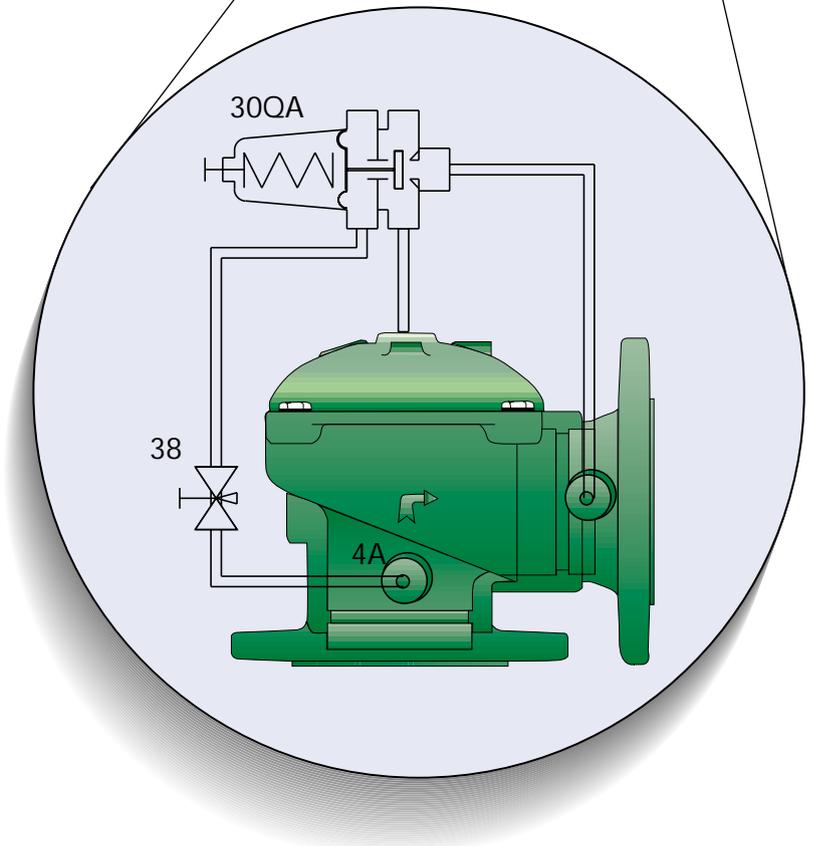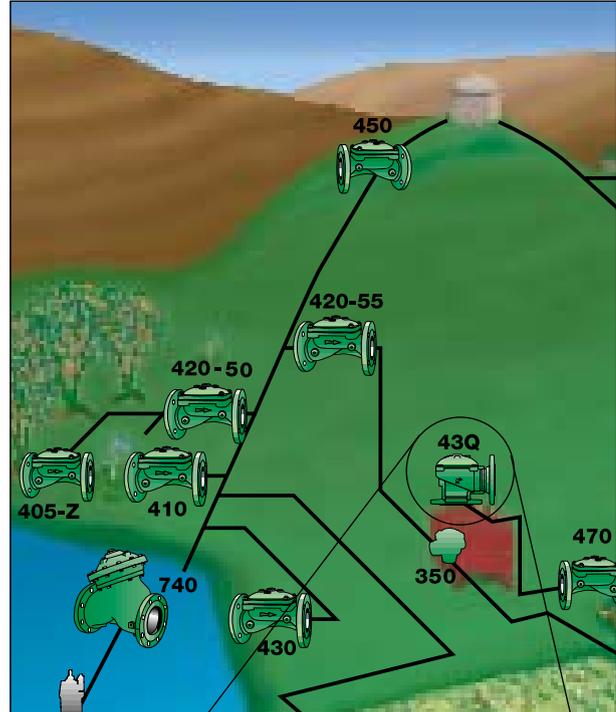

Control list

- | | |
|-------|--------------------------------------|
| 400-A | RAM 400-Angle |
| 4A | In line, Self Flushing Filter |
| 30QA | Quick Pressure, Relief Pilot (metal) |
| 38 | Cock Valve, w/ vent |



RAM 400 Series

Reservoir Float Control Valve (Modulating Type)



Description

Model 450-60 Reservoir Valve is an automatic control valve designed to fill reservoirs or tanks and to shut off when the water reaches a predetermined level. The valve opening will modulate, adjusting the fill rate to a discharge flow while maintaining a constant upper level in the reservoir.

An upper control chamber, operating on a two way control principle, has varying pressure produced by pilot modulation and opens in conjunction with an upstream restriction needle valve.

If the water rises to a predetermined level, float action will tend to close the pilot valve, and the main valve modulates to close. When water level drops below set point, the float will drop, following the water level, releasing water pressure from the control chamber to open the main valve.

Since the control loop is a 2-way loop, the valve will modulate constantly trying to keep the tank level stable.

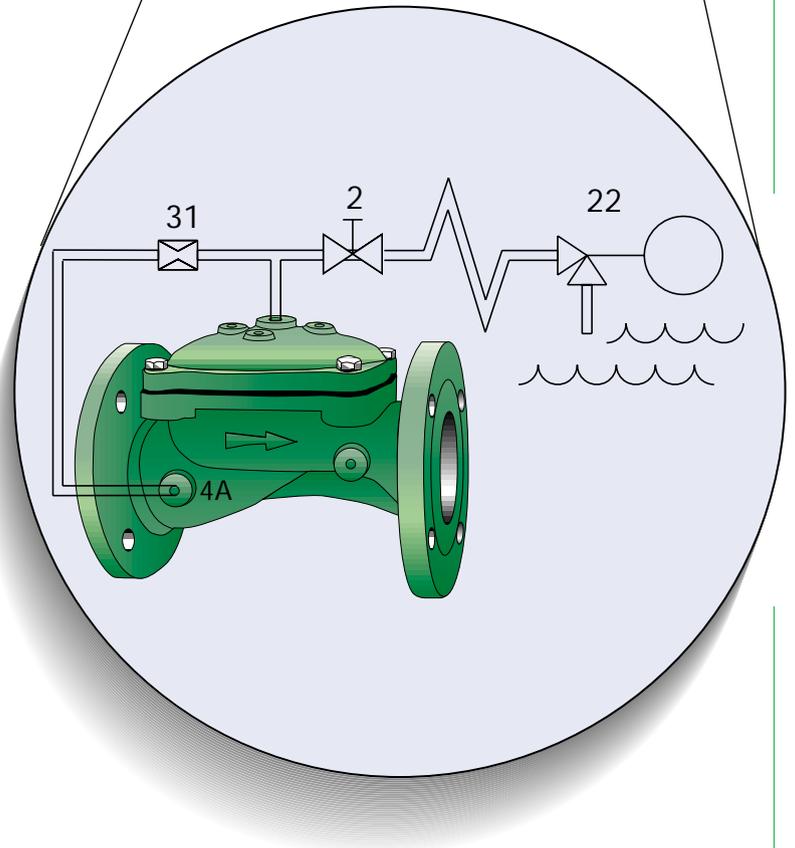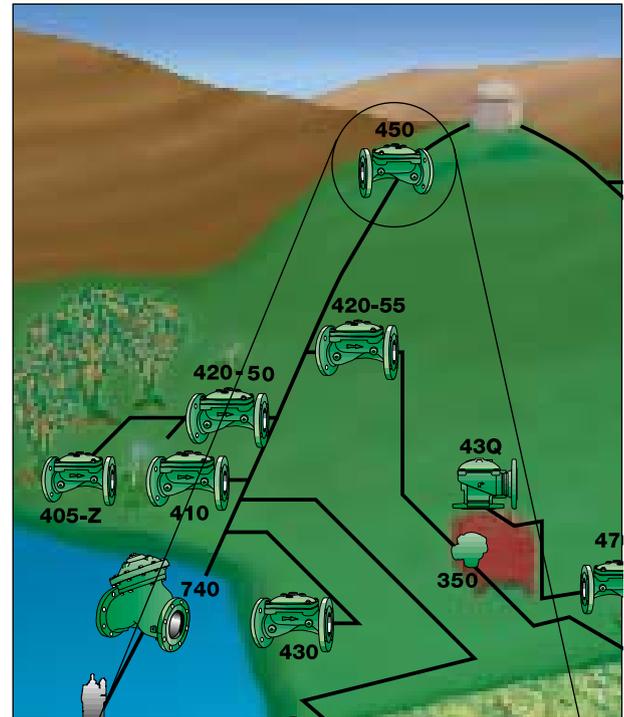

Control list

400-G	RAM 400-Globe
4A	In line, Self Flushing Filter
2	Cock Valve
31	Control Orifice
22	2-way Float Pilot Valve #60



M o d e l 4 5 0 - 6 6

Two-Level Reservoir Control Valve (On-Off type)



RAM 400 Series

Description

Model 450-66 Two-Level Reservoir Control Valve is an automatic control valve designed for two-level control of the water level in reservoirs and tanks. Full valve opening reduces head loss to a minimum, prevents abrasion and reduces cavitation damage.

The valve can be operated via an independent external pressure source when line pressure is very low, or when the water/liquid is very dirty or highly corrosive. When water level rises to the set point, the float mechanism will be lifted by the water and it will reach the set point limit, change position of the pilot valve, and valve will close.

When water level falls, the float will follow the water level. It will change position only when it reaches the lower level limit. The pilot then changes position and valve will open.

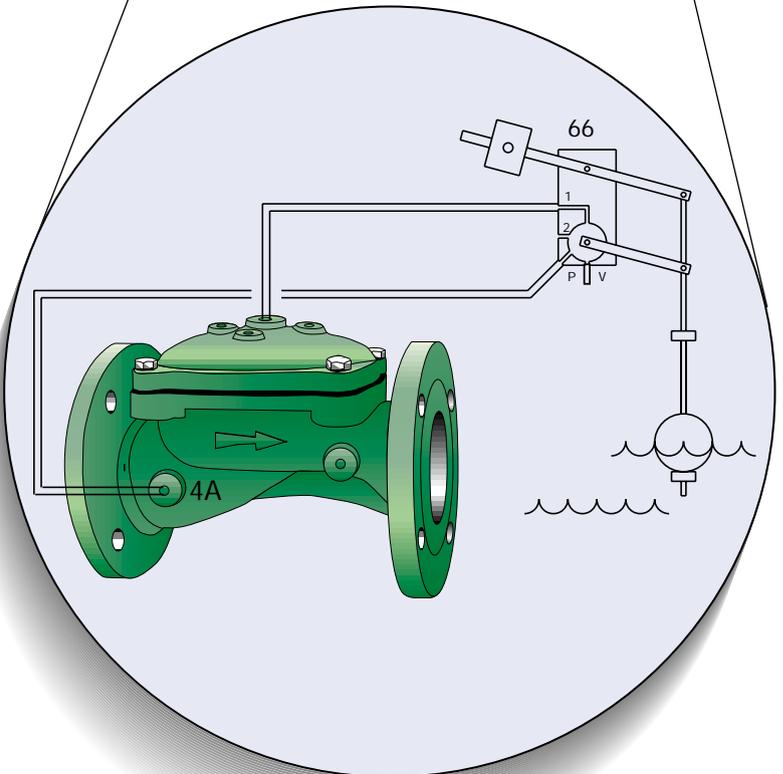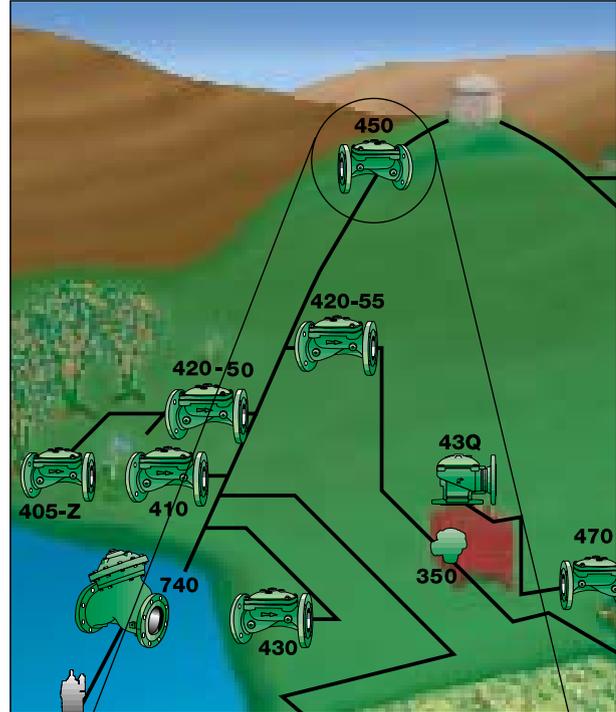

Control list

400-G	RAM 400-Globe
4A	In line, Self Flushing Filter
66	4-way Two Level Float Pilot Valve



RAM 400 Series



Modulating Type, Vertical Float Mechanism

Description

Model 450-67 Modulating Float valve is an automatic control valve designed to maintain a constant level in a reservoir or storage tank by controlling the supply flow into the reservoir/storage tank or (in special applications) the demand flow (discharge) from the reservoir or storage tank.

The float pilot is a 2-way pilot driven by the float mechanism and the water level.

When water level falls the float will react by dropping with the water level, and the main valve opens to supply the used volume back into the tank.

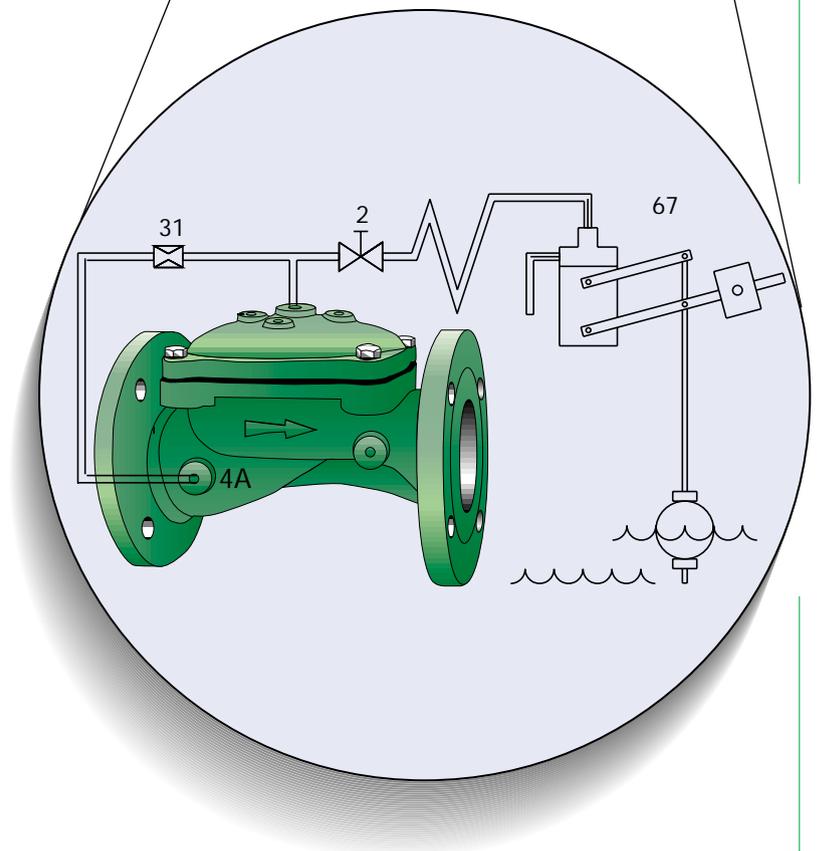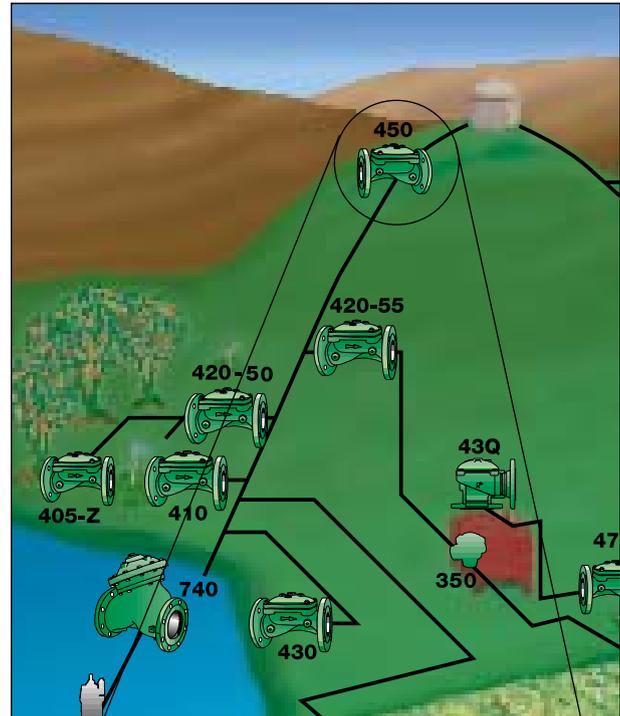

Control list

- 400-G RAM 400-Globe
- 4A In line, Self Flushing Filter
- 67 2-way Float Pilot Valve, Vertical
- 2 Cock Valve
- 31 Control Orifice



M o d e l 4 7 0 - U

Flow Control Valve Orifice Plate Type (2-way control)


RAM 400 Series

Description

Model 470-U-2W Flow Rate Valve is an automatic control valve designed to maintain a constant preset flow rate, regardless of changing system pressure and demand. A valve pressure differential powers the diaphragm to operate the valve.


The valve operates on a two-way control principle. If flow rate exceeds the pilot setting, the increased orifice differential pressure will signal the pilot to command the main valve to throttle.

- Valve is used in sizes 6-10"

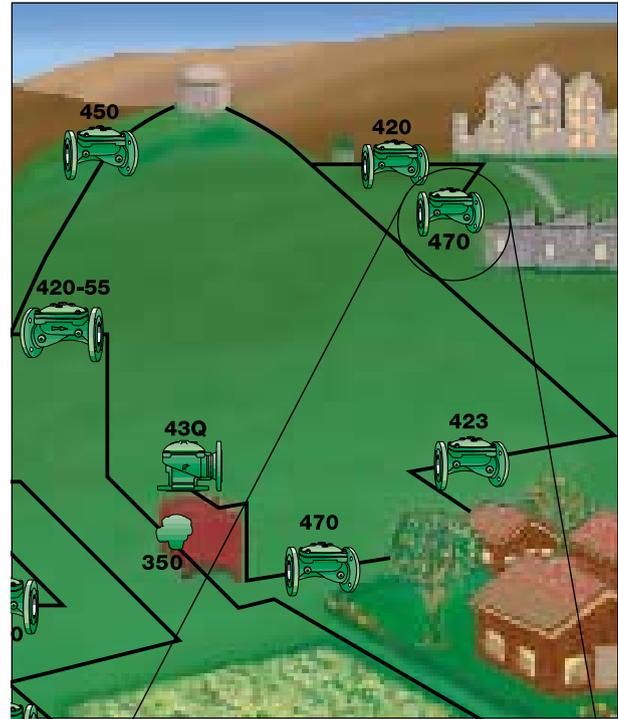

Control list

400-G	RAM 400-Globe
4A	In line, Self Flushing Filter
18D	Differential Pressure-Reducing Pilot Valve #2D
34	Orifice Plate
2	Cock Valve
21	Needle Valve (Integral)

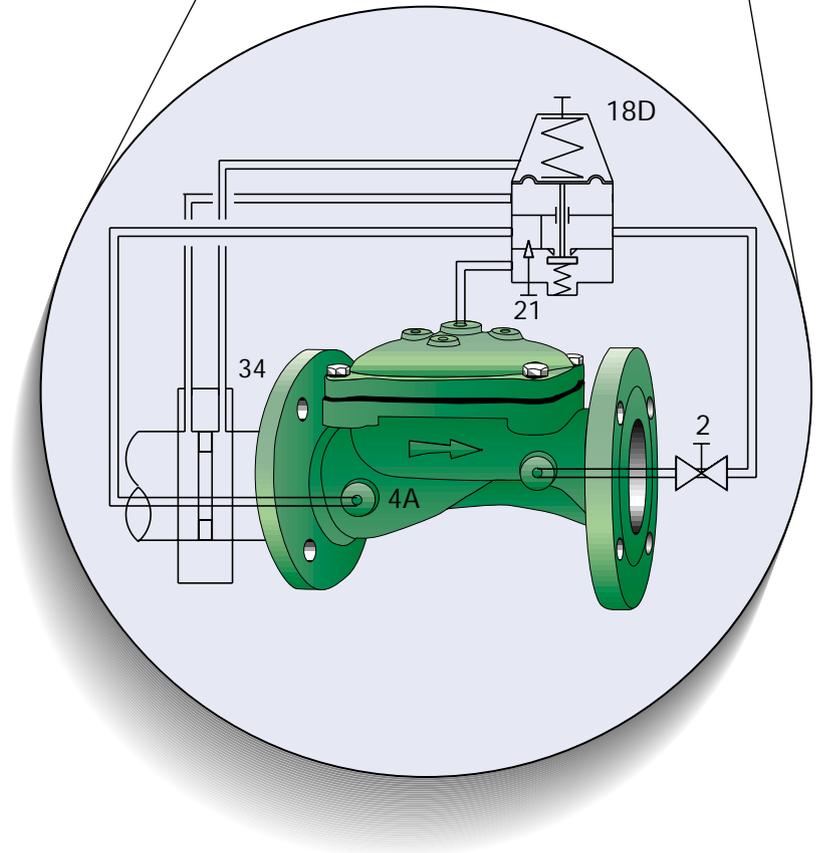



RAM 400 Series


Flow Control Valve Orifice Plate Type (3-Way Control)

Description

Model 470-XU Flow Rate valve is an automatic control valve, designed to maintain a constant preset backflushing flow at gravel filter systems.


The valve operates on a 3-way control principle. It maintains preset flow rate regardless of changing system upstream pressure. If flow rate exceeds the mini pilot setting, the increased orifice differential pressure will signal the mini pilot to order the valve to throttle.

- Valve is used in sizes 2"-4".
- Orifice is usually built in the main valve inlet side.

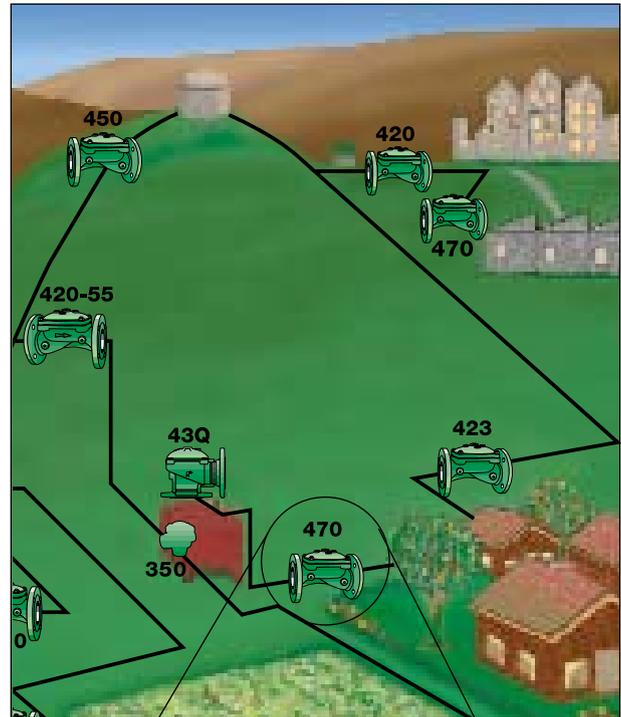

Control list

- | | |
|-------|--|
| 400-G | RAM 400-Globe |
| 4A | In line, Self Flushing Filter |
| 32A | 3-way Positioning Pilot Valve Differential |
| 34 | Orifice Plate |

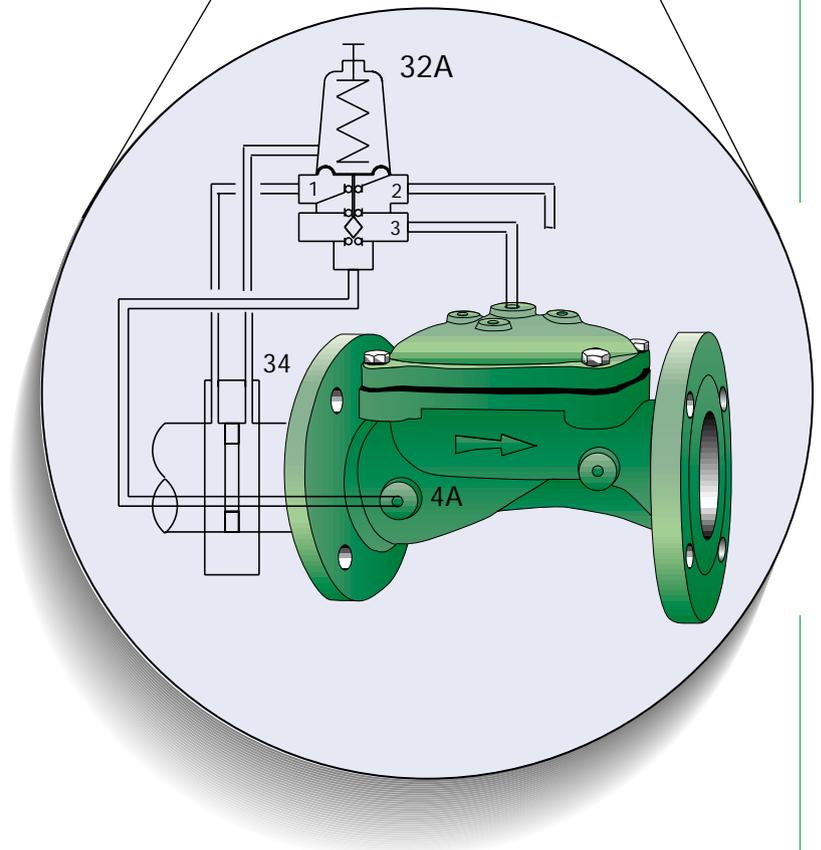



M o d e l 4 7 0 - J Z

Flow Control Paddle Type (3-Way Control)

RAM 400 Series


Description

Model 470-JZ-3W Flow Rate Valve is an automatic control valve, designed to maintain a constant preset flow rate, regardless of changing system pressure and demand. A valve pressure differential powers the diaphragm to operate the valve.

The valve operates on a 3-way control principle. If flow rate exceeds the pilot setting, the increased flow will power the paddle in the stream line. Paddle movement will operate the pilot to command the main valve to throttle.


When flow decreases, the pilot valve and paddle will come to a halt and the pilot will signal the valve to open the flow rate setting.


A 3-way Ball Valve Selector is added to the valve, providing the valve with the option of closing or opening manually.

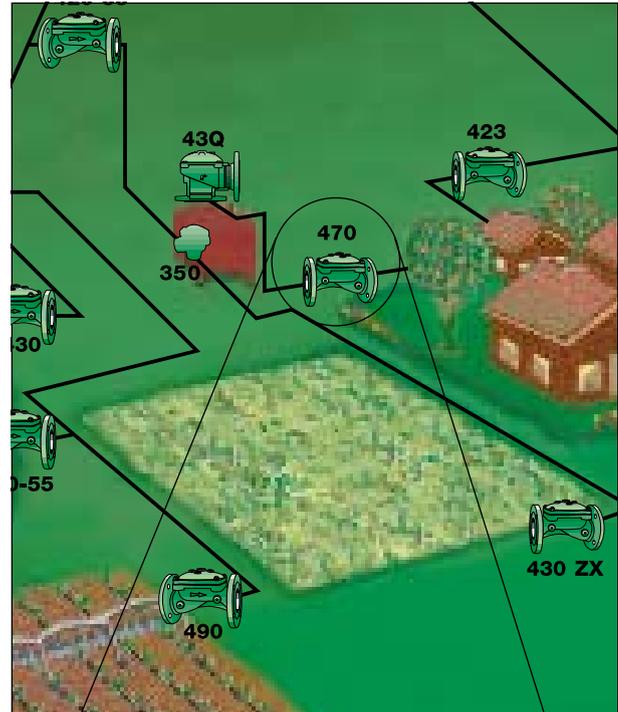

Control list

- | | |
|-------|-------------------------------------|
| 400-G | RAM 400-Globe |
| 26 | 4-way Cock Valve |
| 4A | In Line, Self Washing Filter |
| 29 | Flow, Mini Pilot Valve, Paddle type |

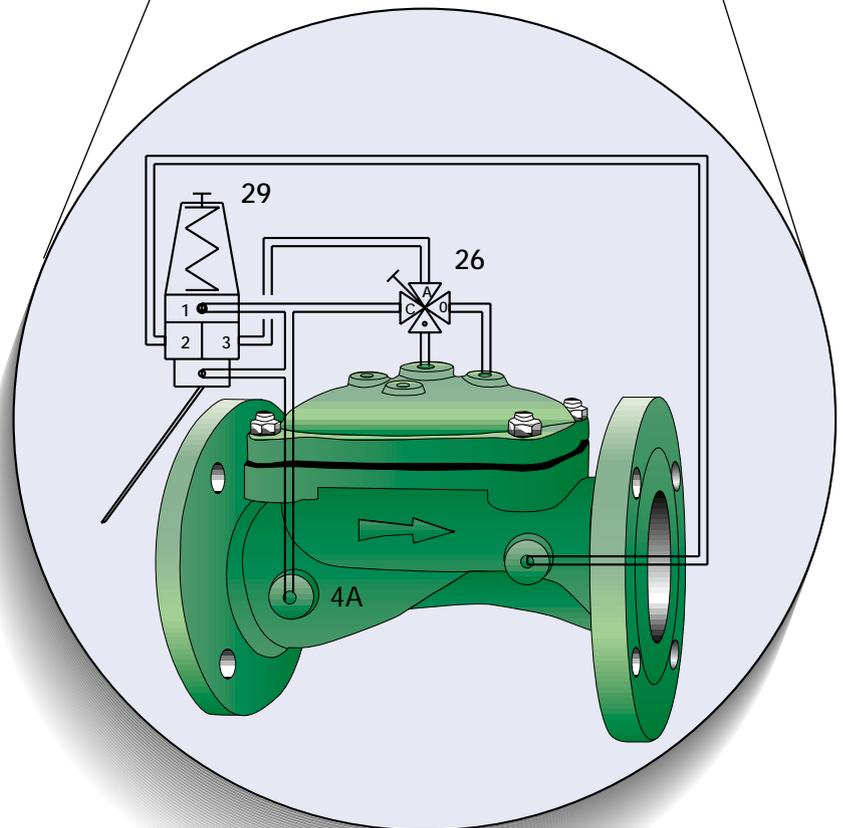



RAM 400 Series



Anti Burst Control Valve

Description

Model 490-UZ Anti Burst (excessive flow) Control Valve, designed to automatically shut off water supply if the flow demand exceeds preset point. The valve operates on a 3-way control principle and installed with an upstream orifice device.

If flow rate exceeds the pilot setting (usually caused by burst pipe), the increased orifice differential pressure will signal the pilot to command the main valve to close and "lock". Reopening the valve requires manual resetting.

- The valve is usually used as a safety device in long water lines.

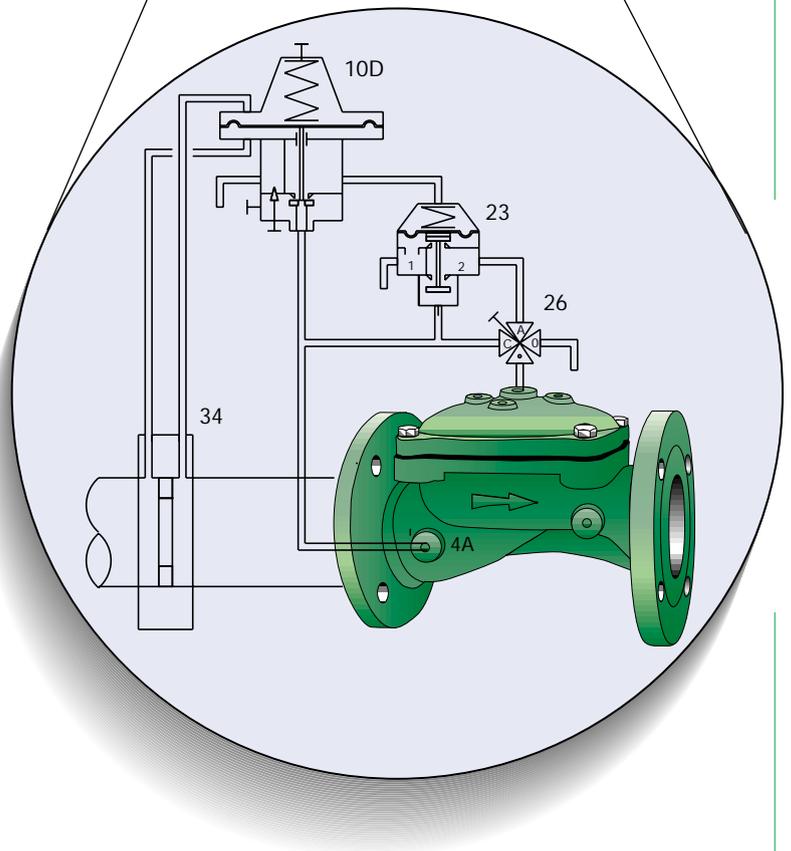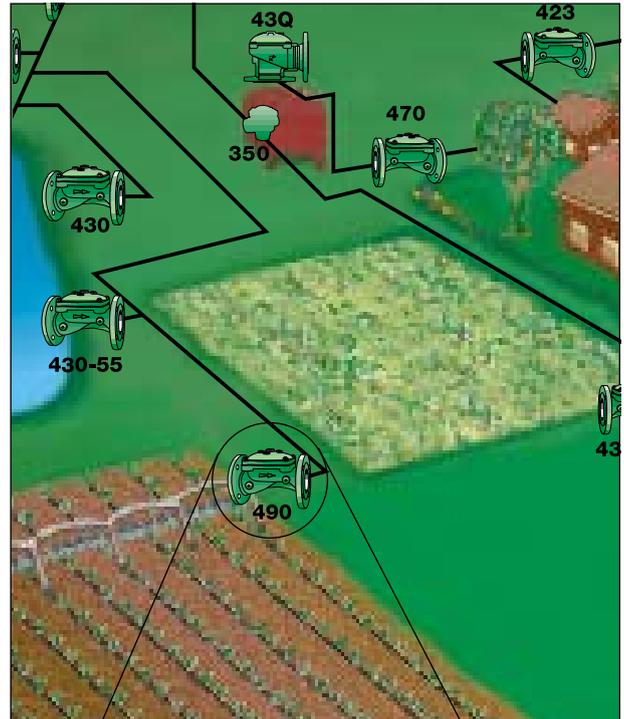

Control list

400-G	RAM 400-Globe
4A	In line, Self Flushing Filter
10D	3-way Positioning Pilot Valve #X Differential
34	Orifice Plate
23	3-way Hyd. Remote Control Valve
26	4-way Cock Valve