

# SOLOLIFT 2



Sololift2 lifting stations are practical, compact and ready to install solution for discharging domestic effluent that cannot reach the main sewage pipe directly. They have the ability to grind and evacuate sewage and wastewater quickly and efficiently. They offer the ideal solution for the renovation and modernisation of existing buildings, where the location may be remote from the main soil pipe without the need for costly pipe installations. Sololift2s are able to be installed where a natural slope cannot be installed in a shower or toilet. Further, they are available in wall hung and freestanding models which cater to every space.



## Features

- The most powerful, reliable and service friendly lifting station on the market
- Unique, welded, pressure tight tank
- Smart adjustable inlet connectors allow movement of up to 10 mm - easy installation and replacement
- Captive screw fastening, external pressure switch and tank draining enable fast and clean repairs and service

## Technical Data

- Maximum liquid temperature: 50°C (90°C SOLOLIFT2 C-3 (30 min))
- Unique, welded, pressure tight tank to ensure safety and reliability particularly in high pressure grey water applications
- Smart adjustable inlet connectors allow movement of up to 10 mm, both vertically and horizontally for easy fitting to existing pipes
- 1.2 metre cable with plug


## Dimensions

Model	Power (Watts)	Dimensions (mm)		Weight (kg)
		H	L	
SOLOLIFT WC-1	620	347	453	7.2
SOLOLIFT WC-3	620	347	453	7.5
SOLOLIFT CW-3	620	368	495	7
SOLOLIFT C-3	640	255	373	6.5
SOLOLIFT D-2	280	147	147	4.2


## Applications

- SOLOLIFT2 lifting stations are practical, compact, and ready to install solution for discharging domestic effluent that cannot reach the main sewage pipe directly
- Sololift2 WC versions grind and evacuate sewage and wastewater quickly
- They are the ideal solution for the renovation or modernization of existing buildings where the location may be remote from the main soil pipe with out the need for costly pipe installations
- Enables installations of toilets and showers where a natural slope cannot be established
- The SOLOLIFT2 is ready to install offering easy installation and maintenance
- Wall hung and freestanding models cater to every space


**SOLOLIFT2 C-3** for washing machines, dishwasher, kitchen sink, bathtub, shower and washbasin

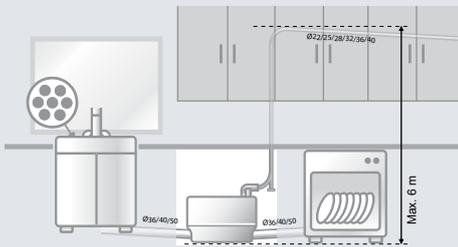


**SOLOLIFT2 D-2** for shower and wash basin

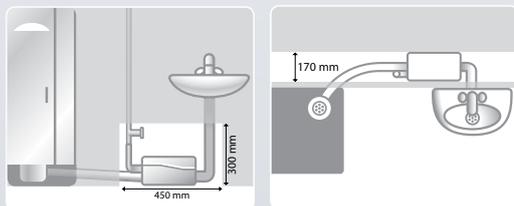

**SOLOLIFT2 WC-1** for single toilet and washbasin

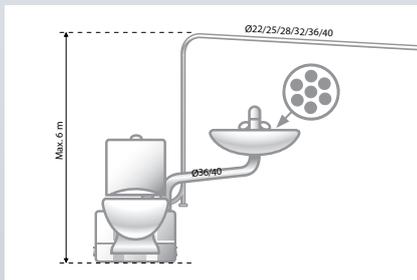


**SOLOLIFT2 WC-3** for toilet, washbasin, bidet and a shower

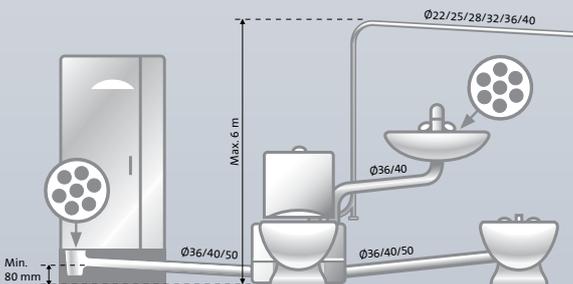


**SOLOLIFT2 CWC-3** for wall-hung toilet, washbasin, bidet and a shower




## Technical Data

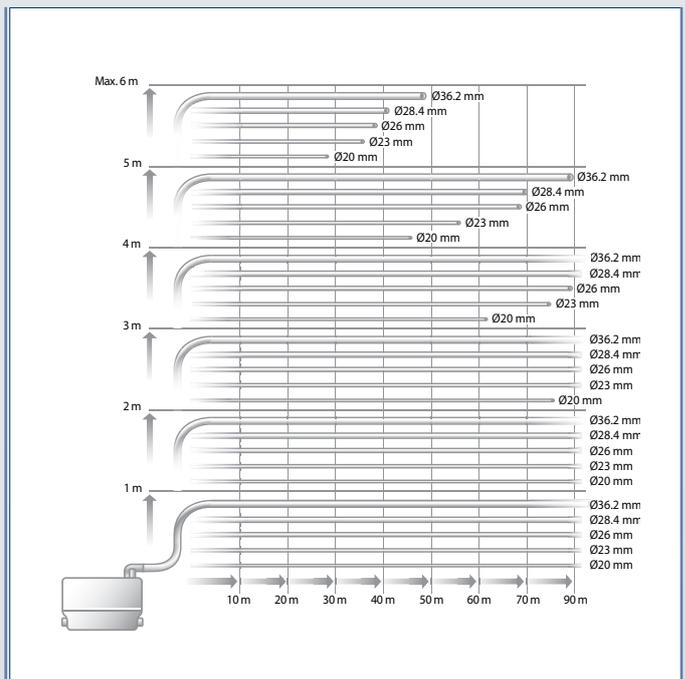

**SOLOLIFT2 C-3**

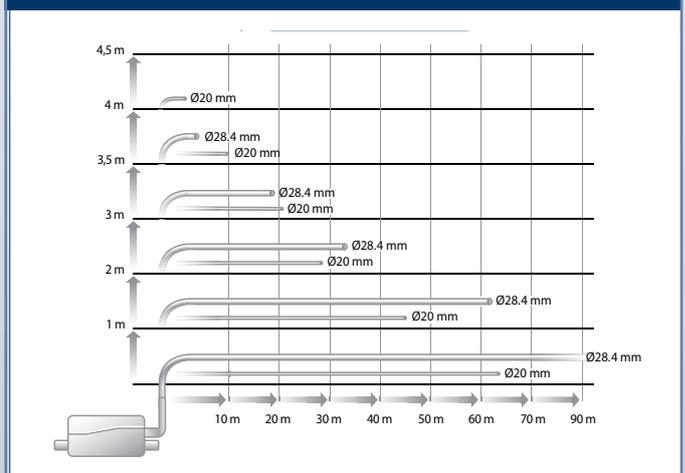

**SOLOLIFT2 D-2**

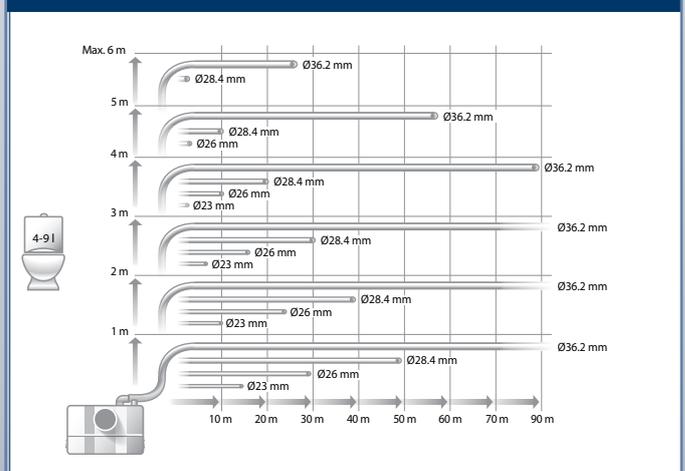

**SOLOLIFT2 WC-1 SOLOLIFT2 WC-3 SOLOLIFT2 CWC-3**