


TYPE 6 MECHANICAL SEALS

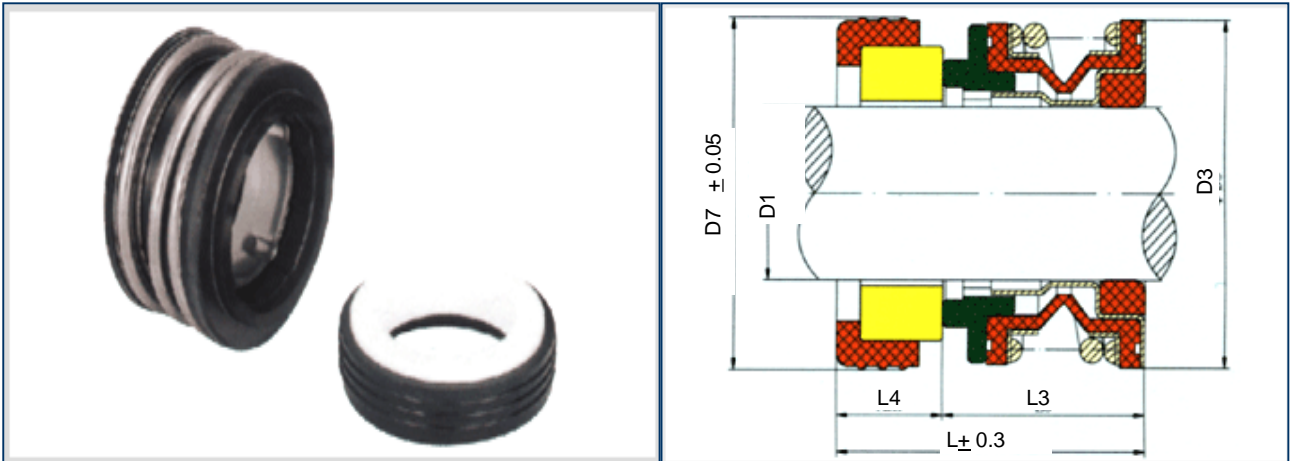

D1	D3	D7	L3	L4	L = L3+L4
T6-0.375	24.00	22.20	16.70	6.30	23.00
T6-0.500	27.00	25.40	16.70	8.00	24.70
T6-0.625	31.00	31.75	18.30	10.30	28.60
T6-0.750	35.00	34.95	18.30	10.30	28.60
T6-1.000	43.50	41.30	20.70	11.00	31.70

Operating Parameters:

Temp: -30 C - 200 C.
 (Depending on material used)
 Pressure: Up to 5 Bar, 75 PSI.
 Shaft Speed: Up to 5 m/sec 1000 FPM

Face Combinations:

Carbon, Ceramic, Silicon, Tungsten

Elastomers:

Nitrile, Viton, EPDM.