


TYPE 7 MECHANICAL SEALS

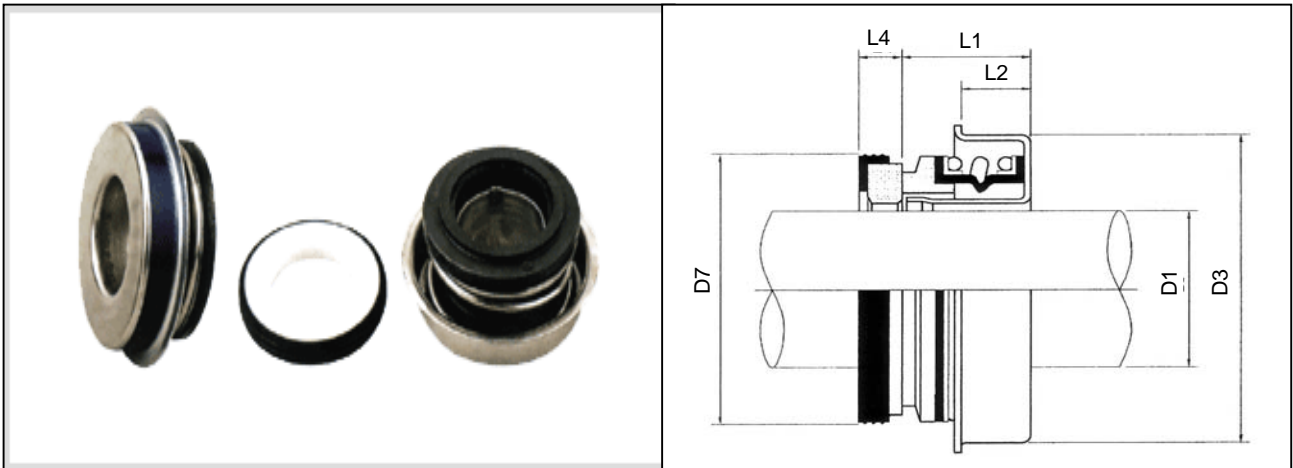

D1	D3	D7	L1	L4	L3
T7-0.375	24.00	23.00	10.00	8.00	
T7-0.500	28.50	25.40	10.20	8.00	6.30
T7-0.500	30.00	25.00	10.20	8.00	5.00
T7-0.500	33.40	25.40	10.20	8.00	6.30
T7-0.625	36.50	31.00		10.00	10.30
T7-0.625	38.10		11.00	10.00	
T7-0.750	40.00	35.00	11.00	10.00	10.30
T7-1.000	47.00	41.30	19.00	12.00	
T7-1.125	52.00	48.00	16.00	12.00	

Operating Parameters:

Temp: -30 C - 200 C.

(Depending on materials used)

Pressure: Up to 4 Bar, 60 PSI.

Shaft Speed: Up to 10 m/sec 2000 FPM

Face Combinations:

Carbon, Ceramic, Silicon, Tungsten

Elastomers:

Nitrile, Viton, EPDM.