

ADVANCED™ Series Plastic Bolted Pumps

Features

- ADS: Pro-Flo®, Pro-Flo X™, Accu-Flo™
- Superior flow rates
- Superior containment
- Anti-freezing technology
- Portable & submersible
- DIN (ANSI) liquid connections available
- Lube-free operation

Tech Data



- Sizes: 6 mm (1/4") through 76 mm (3")
- Materials: Polypropylene, PVDF, PFA
- Material Temperatures: Up to 107°C (225°F)
- Elastomers: Buna-N, Neoprene, EPDM, Viton®, Wil-Flex™, Saniflex™, Polyurethane, PTFE, Geolast®

Performance Data



- Max flow rates: 784 lpm (207 gpm)
- Max suction lift: 9.8 m (32.0') Wet, 6.6 m (21.6') Dry
- Max disp. Per Stroke: 3.75 L (0.99 gal)
- Max discharge pressure: 8.6 bar (125 psig)
- Max size solids: 12.7 mm (1/2")

PLASTIC CURVES



P25
6 mm (1/4")
PLASTIC

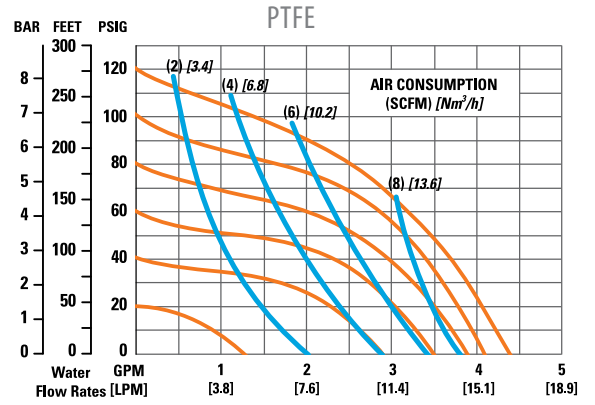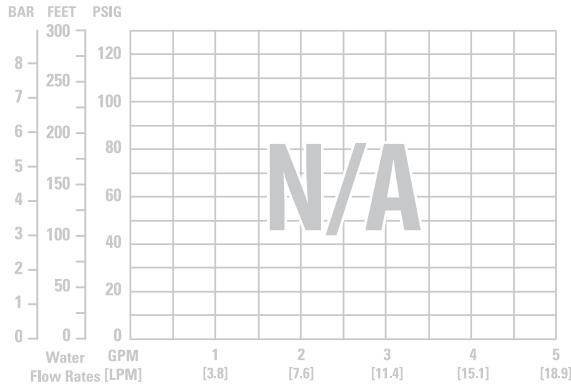

P100
13 mm (1/2")
PLASTIC

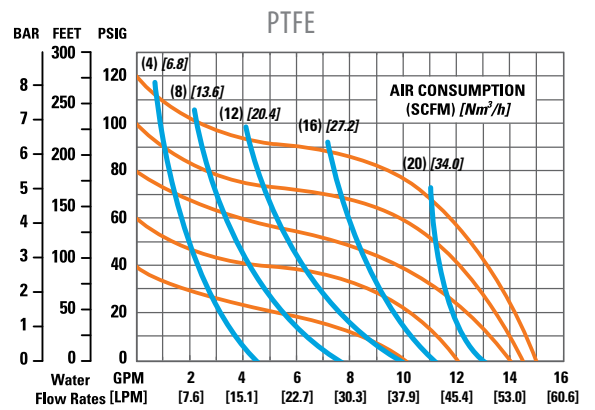
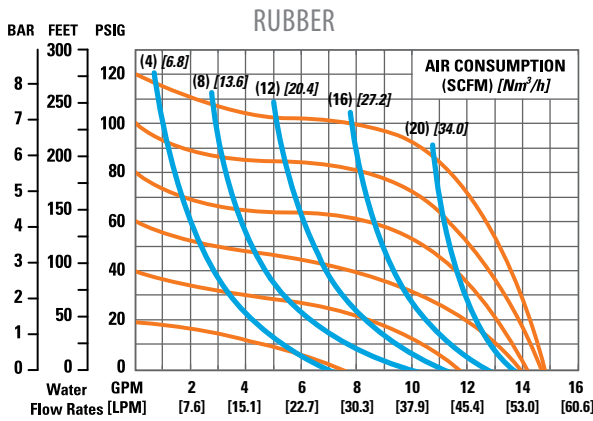


P200
25 mm (1")
PLASTIC

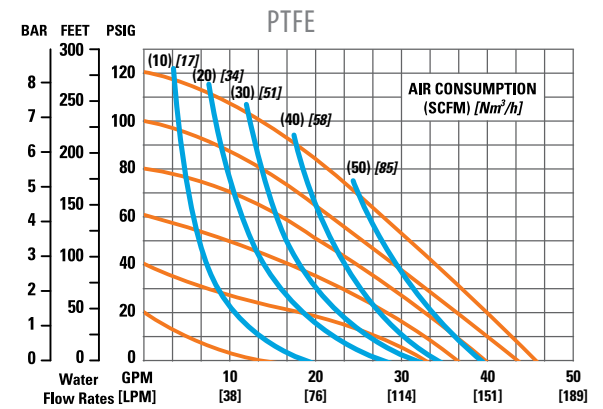
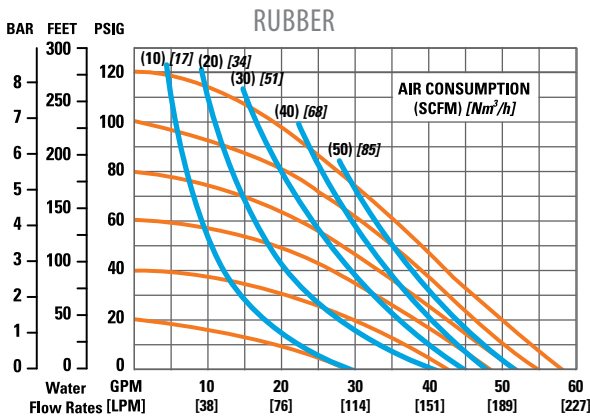


PLASTIC CURVES



P400
38 mm (1-1/2")
PLASTIC

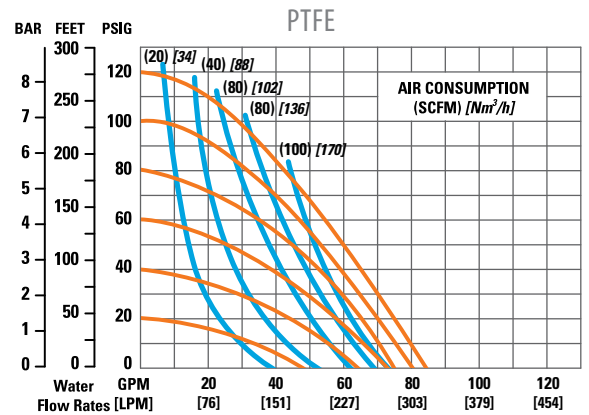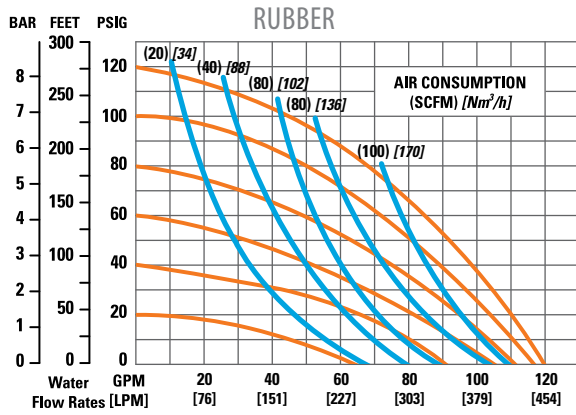

PX400
38 mm (1-1/2")
PLASTIC

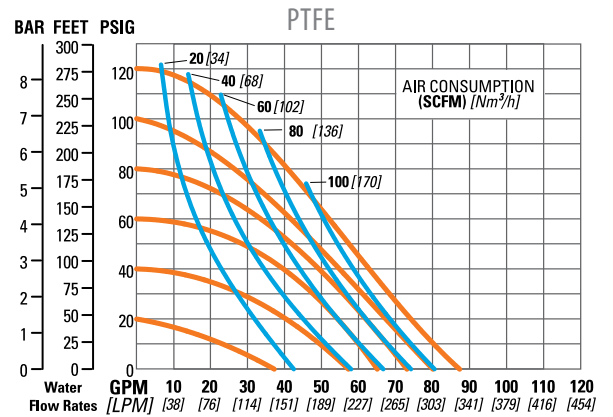
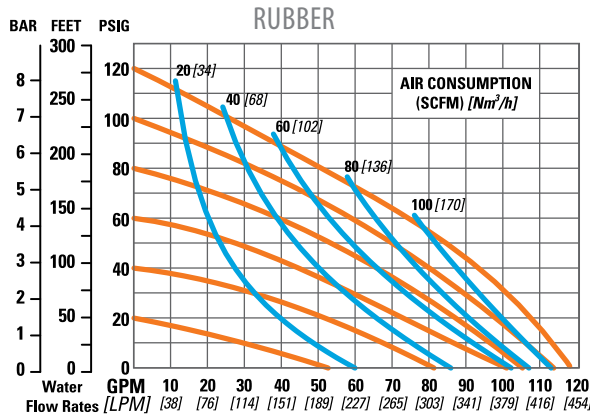


P800
51 mm (2")
PLASTIC

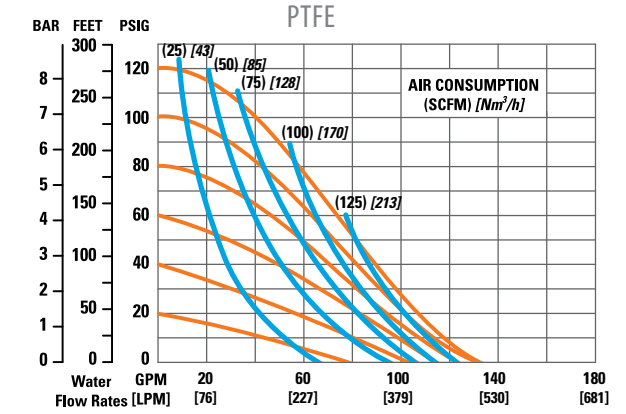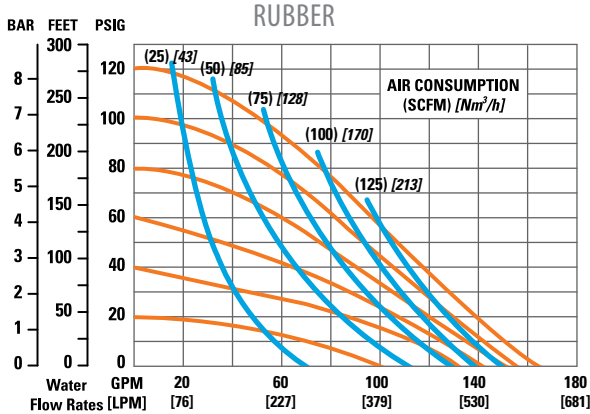

PLASTIC CURVES

PX800
51 mm (2")
PLASTIC

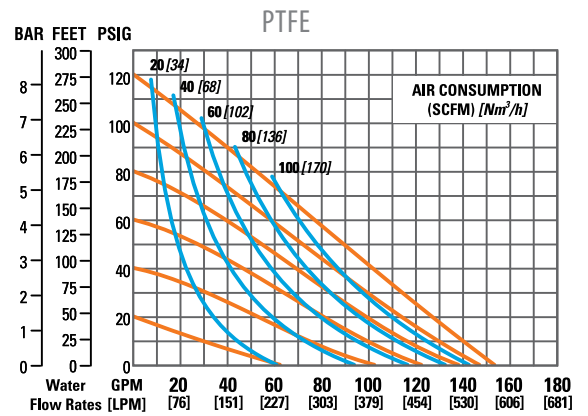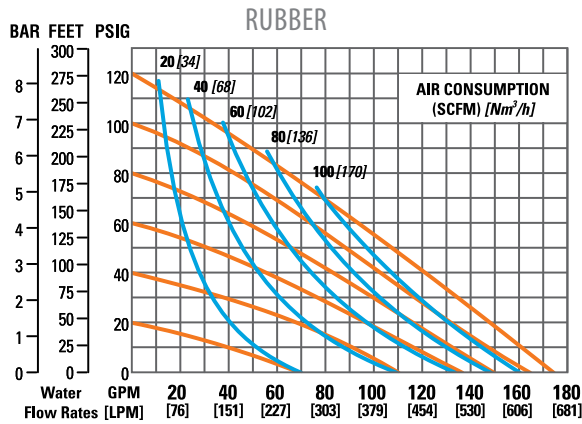

P1500
76 mm (3")
PLASTIC

